


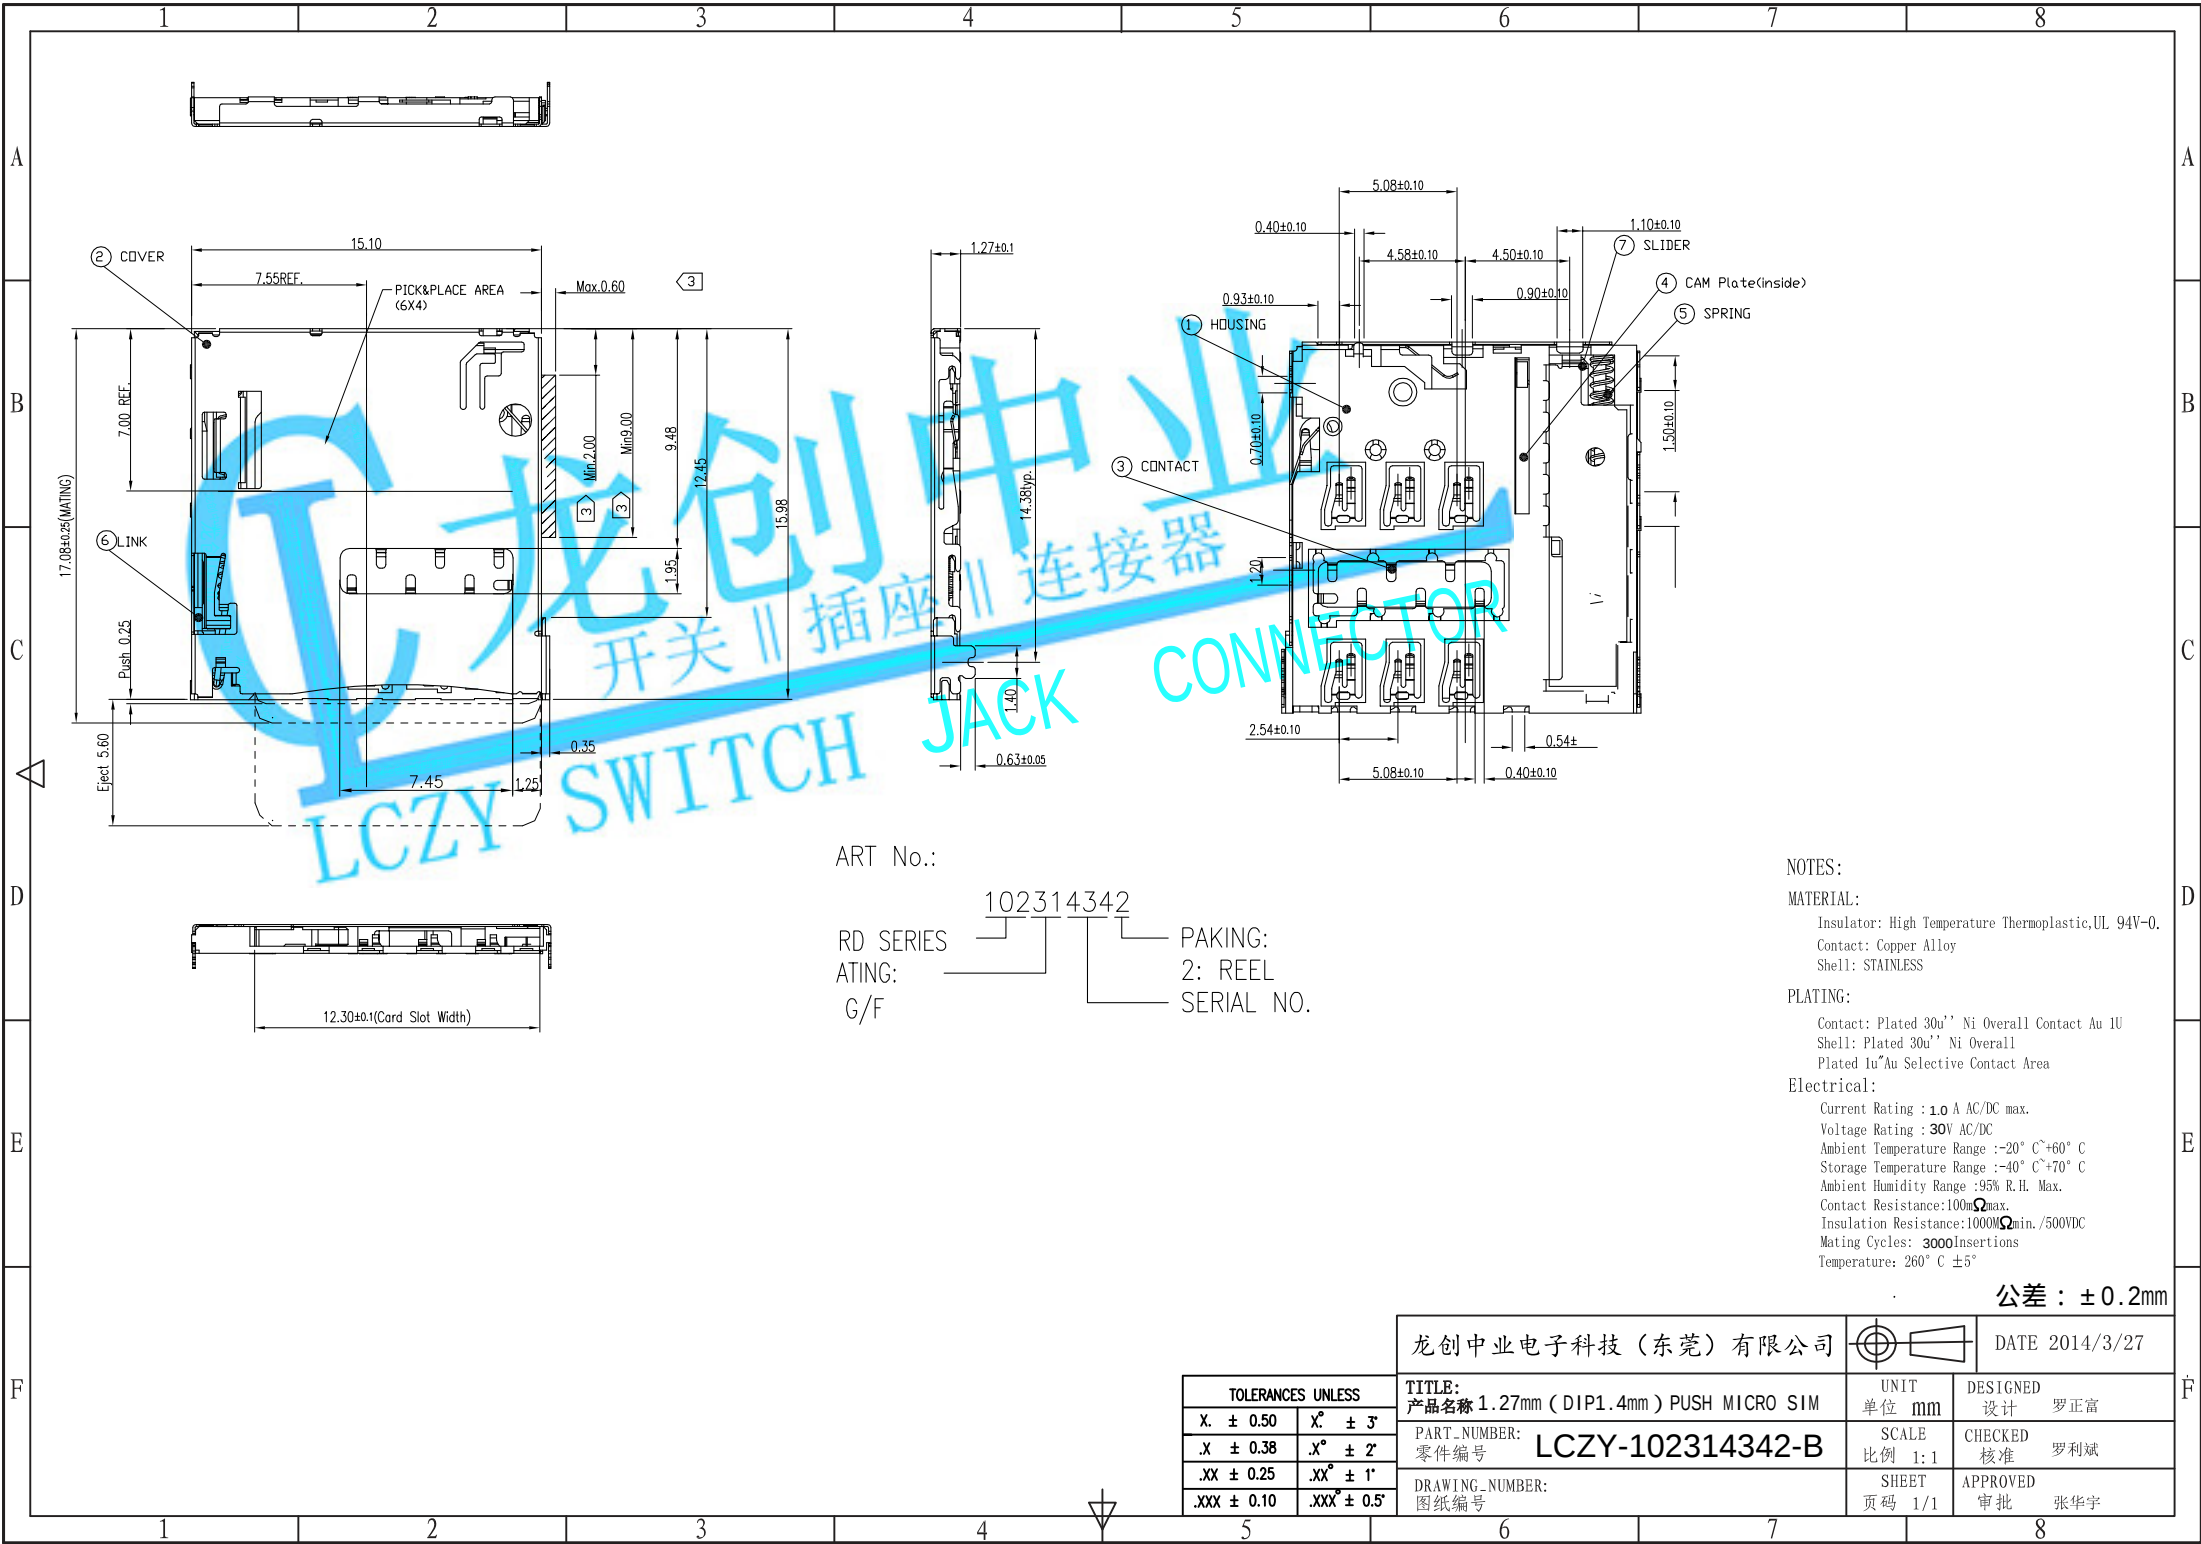

ART No.:

RD SERIES  
ATING:  
G/F

102314342

PAKING:  
2: REEL  
SERIAL NO.

NOTES:

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.  
Contact: Copper Alloy  
Shell: STAINLESS

PLATING:

Contact: Plated 30u'' Ni Overall Contact Au 1U  
Shell: Plated 30u'' Ni Overall  
Plated 1u'' Au Selective Contact Area

Electrical:

Current Rating : 1.0 A AC/DC max.  
Voltage Rating : 30V AC/DC  
Ambient Temperature Range :-20° C~+60° C  
Storage Temperature Range :-40° C~+70° C  
Ambient Humidity Range :95% R.H. Max.  
Contact Resistance:100mΩ max.  
Insulation Resistance:1000MΩ min./500VDC  
Mating Cycles: 3000Insertions  
Temperature: 260° C ±5°

公差 : ±0.2mm

|                                                 |  |                 |                    |
|-------------------------------------------------|--|-----------------|--------------------|
| 龙创中业电子科技(东莞)有限公司                                |  |                 | DATE 2014/3/27     |
| TITLE:<br>产品名称 1.27mm (DIP1.4mm) PUSH MICRO SIM |  | UNIT<br>单位 mm   | DESIGNED<br>设计 罗正富 |
| PART NUMBER:<br>零件编号 LCZY-102314342-B           |  | SCALE<br>比例 1:1 | CHECKED<br>核准 罗利斌  |
| DRAWING NUMBER:<br>图纸编号                         |  | SHEET<br>页码 1/1 | APPROVED<br>审批 张华宇 |

| TOLERANCES UNLESS |              |
|-------------------|--------------|
| X. ± 0.50         | X° ± 3°      |
| .X ± 0.38         | .X° ± 2°     |
| .XX ± 0.25        | .XX° ± 1°    |
| .XXX ± 0.10       | .XXX° ± 0.5° |