
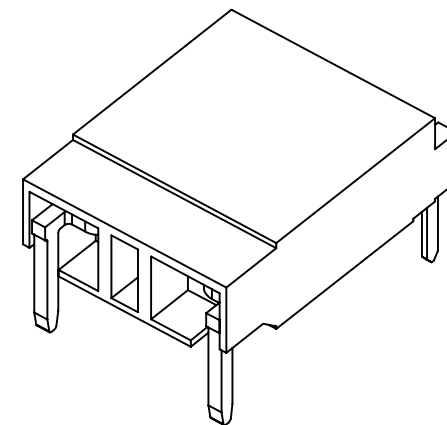


RoHS Compliant

成品图

SPECIFICATION

- 1 Contact resistance: $\leq 10\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 1400 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 3800V AC/minute
- 6 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

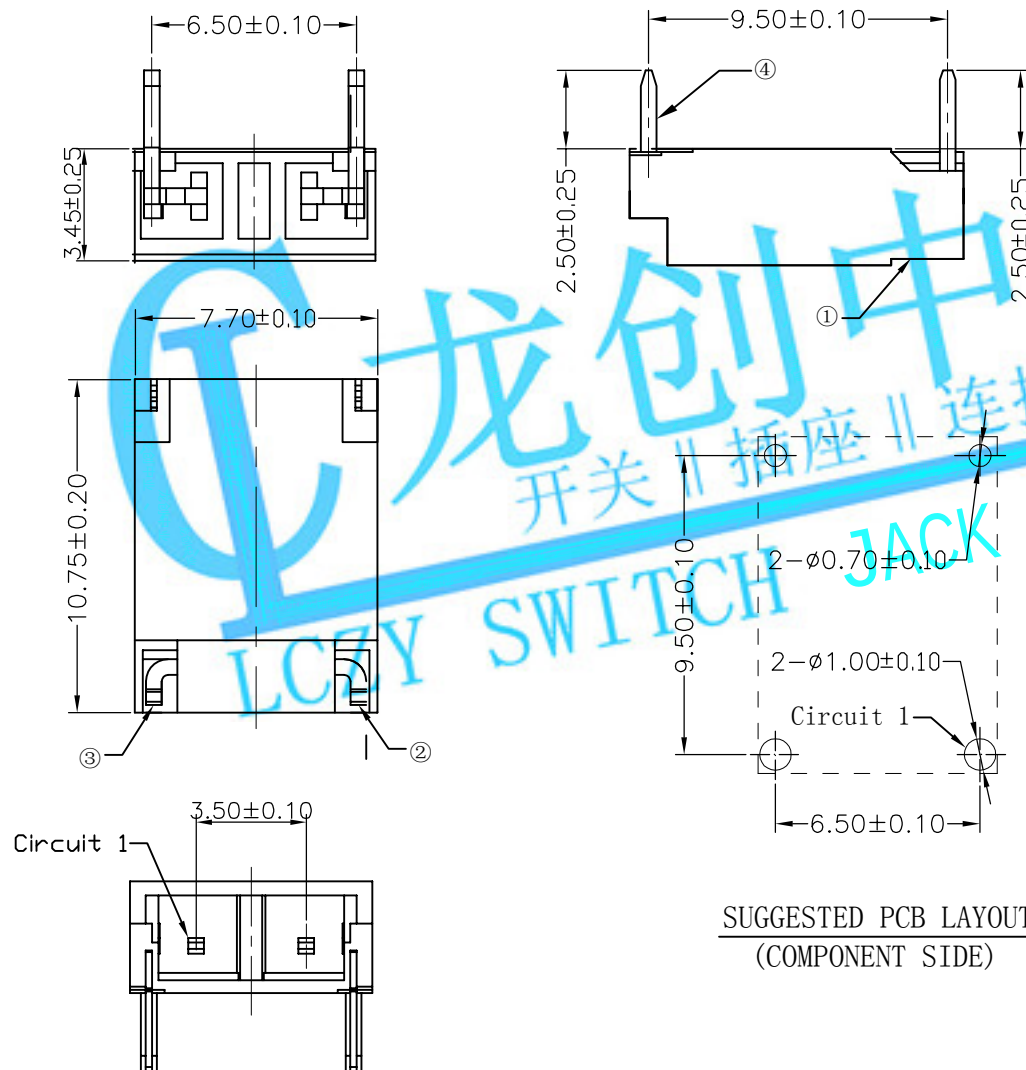

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

B/0	2016.05.10	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.

④	Solder Tabs	2	Phosphor Bronze	
③	Contacts 2	1	Phosphor Bronze	
②	Contacts 1	1	Phosphor Bronze	
①	Insulator	1	PA46 (UL94V-0)	Beige
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

Model Name:3.50mm PITCH 90° WAFER		
Model No: A3501AW-02-C1M*-G		
	SCALE:FULL	REVISION:B/0
龙创中业电子科技(东莞)有限公司		

Drawn:	
Checked:	BH-3.5-2P-W-DIP
Approved:	