
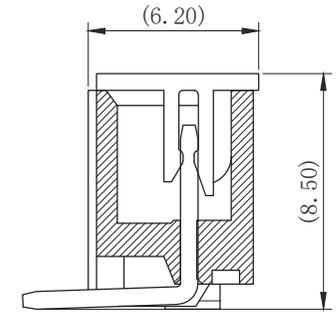
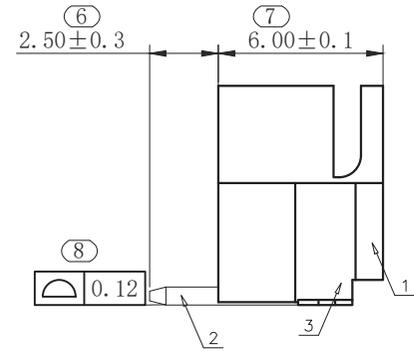


REV.	DESCRIPTION	DATE
A/0	新版发行	2013.10.13


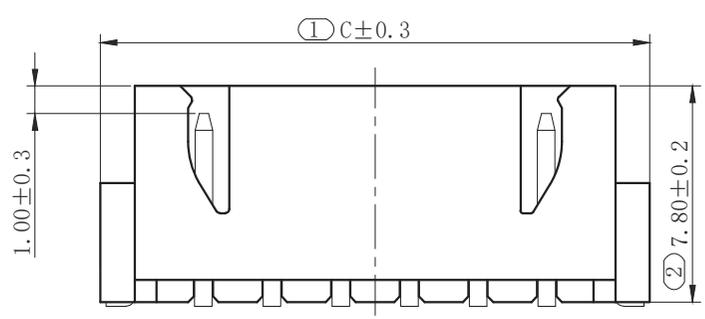


XH-2.54-XP-LT

孔位 poles	A	B	C
2	2.5	5.9	10.0
3	5.0	8.4	12.5
4	7.5	10.9	15.0
5	10.0	13.4	17.5
6	12.5	15.9	20.0
7	15.0	18.4	22.5
8	17.5	20.9	25.0
9	20.0	23.4	27.5
10	22.5	25.9	30.0
11	25.0	28.4	32.5
12	27.5	30.9	35.0
13	30.0	33.4	37.5
14	32.5	35.9	40.0
15	35.0	38.4	42.5
16	37.5	40.9	45.0

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ ;
- 3、额定电流: 3A AMPS (24#);
- 4、额定电压: 250V, AC, DC (等效);
- 5、接触电阻:  $\leq 0.03 \Omega$ ;
- 6、绝缘电阻:  $\geq 1000 \Omega$ ;
- 7、耐压: 1000V, AC/minute.

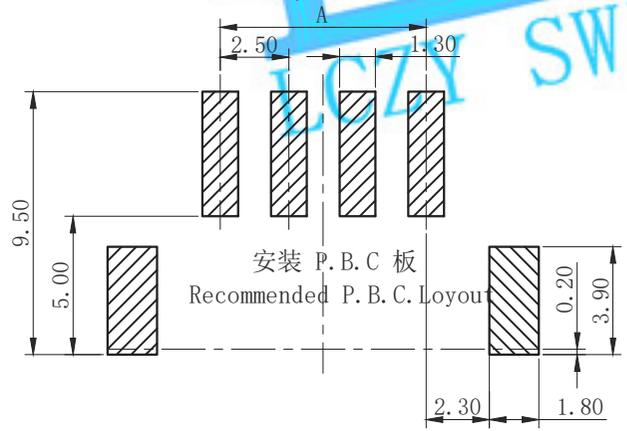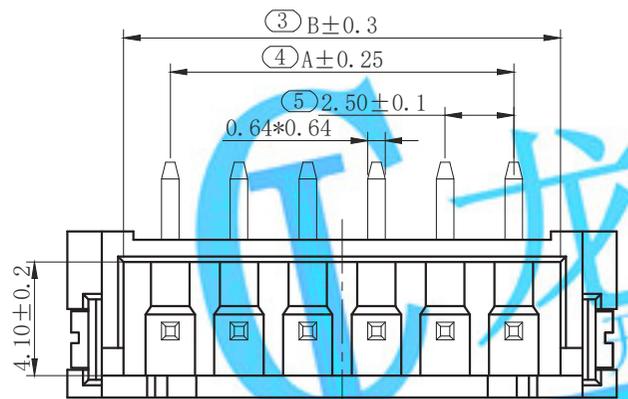

借用登记
旧底图总号
底图总号
签字
日期

3	焊片 fitting	黄铜		电镀铜: 整个表面镀层30u*MIN, 厚镀层 80u*MIN.
2	端子 Contact	黄铜	n*1	电镀铜: 整个表面镀层30u*MIN, 厚镀层 80u*MIN.
1	基板 Wafer	LCP (UL94V-0)	1	白色
序号	名称	材料	数量	附注

GENERAL TOLERANCES			DRAWN BY	林振华/2013.10.13	龙创中业电子科技(东莞)有限公司		
0.X	$\pm 0.25$	X. <sup>o</sup>	$\pm 3^{\circ}$	CHK. BY		姚海滨/2013.10.13	
0.XX	$\pm 0.12$			APRV. BY		丁特尔/2013.10.13	
0.XXX	$\pm 0.05$	X.X <sup>o</sup>	$\pm 0.5^{\circ}$	DRAWING NO.		SHEET	PROD. NAME
UNIT	SIZE	SCALE	DRAWING NO.		1 OF 1	PART NO. XH-2.54-XP-LT	
MM	A4	1:1	TITLE		2.5 WTB CONN. SMT SINGLE ROW VERTICAL		