







借用登记

旧底图总号

底图总号

签字

日期

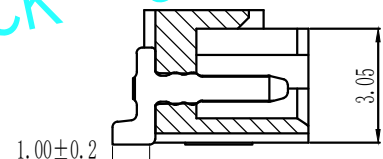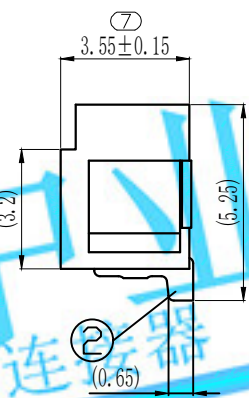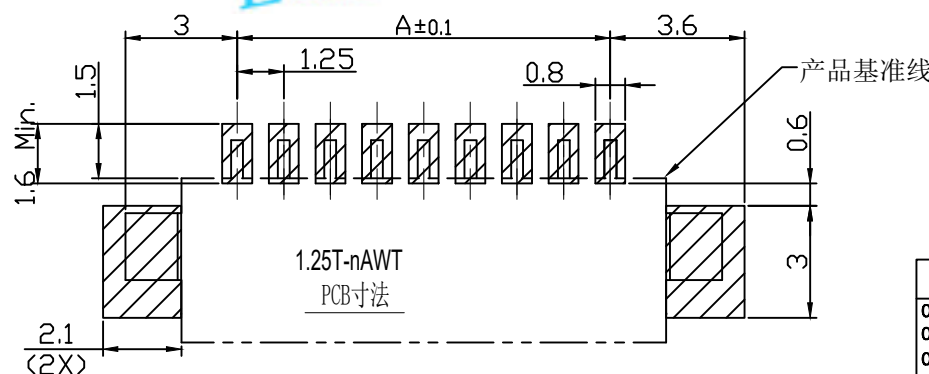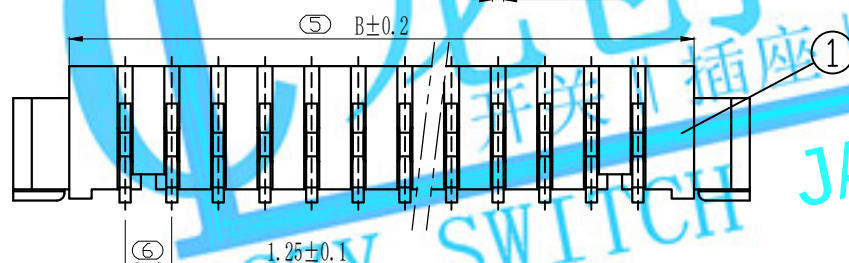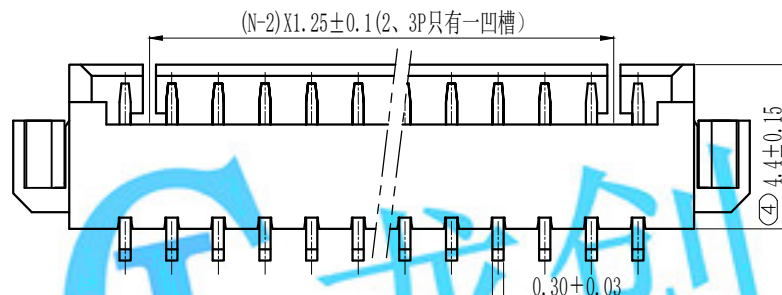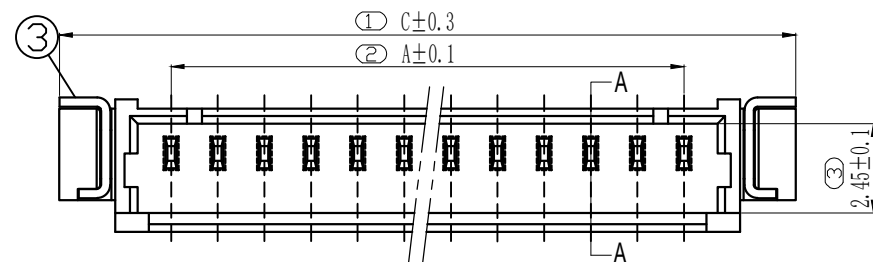

SECTION A-A

REV.	DESCRIPTION	DATE
B/0	升 B 版	2011.11.16

- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
 - 2、温度范围: -25° C~85° C;
 - 3、额定电压: 200V, AC, DC(等效);
 - 4、额定电流: 1A
 - 5、接触电阻: ≤0.03 Ω;
 - 6、绝缘电阻: ≥1000M Ω;
 - 7、耐压: 1000V, AC/minute.

- ROHS管理规定:
- 1、禁止使用含有ROHS指令所限制的物质。
 - 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表, 有效期一年。

PH-1.25-XP-WT

CKT	Dim A	Dim B	Dim C
2	1.25	4.25	7.3
3	2.5	5.5	8.55
4	3.75	6.75	9.8
5	5	8	11.05
6	6.25	9.25	12.3
7	7.5	10.5	13.55
8	8.75	11.75	14.8
9	10	13	16.05
10	11.25	14.25	17.3
11	12.5	15.5	18.55
12	13.75	16.75	19.8
13	15	18	21.05
14	16.25	19.25	22.3
15	17.5	20.5	23.55
16	18.75	21.75	24.8

3	插 Fitting Nail	黄铜 Brass	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u" MIN.
2	焊 Contact	黄铜 Brass	n×1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u" MIN.
1	基 Wafer	LCP	1	粘
序号	名称	材料	数量	附注

GENERAL TOLERANCES				DRAWN BY 林振华/2011.11.16		龙创中业电子科技(东莞)有限公司			
0.X	±0.25	X.*	±3°	CHK. BY 姚海滨/2011.11.16					
0.XX	±0.12			APRV. BY 张名/2011.11.16					
0.XXX	±0.05	X.X*	±0.5°						
UNIT	SIZE	SCALE		DRAWING NO.		SHEET		PROD. NAME 1.25WT-nP	
MM	A4	1:1				1 OF 1		PART NO. PH-1.25-XP-WT	
TITLE									