


1018A-XX X X X

No of Ckts ————
 Packing ————
 0: Tape & Reel

Plating ————
 1: Gold Flash





M: Mylar
 C: CAP

- NOTES:
- MATERIAL:
 HOUSING: HIGHT-TEMP PLASTIC, UL 94-V0, COLOR: NATURE;
 CONTACT: COPPER ALLOY;
 LEG: COPPER ALLOY;
 - PLATING:
 CONTACT: GOLD PLATED ON NICKEL OVERALL.
 LEG: GOLD PLATED ON NICKEL OVERALL.
 - RATING:
 CURRENT RATING: 1.0A AC/DC
 VOLTAGE RATING: 125V AC/DC
 TEMPERATURE RANGE: -25°C~+85°C;
 - PART NO:

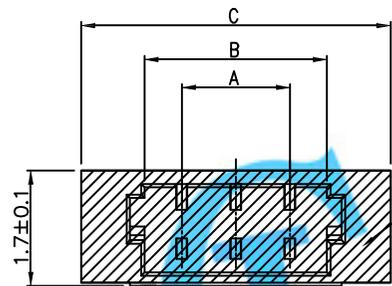

2~5P Mylar 长*宽 3.0*1.7
 6~10P Mylar 长*宽 6.0*1.7
 11~15P Mylar 长*宽 9.0*1.7
 15~20P Mylar 长*宽 12.0*1.7

Circuit NO.1

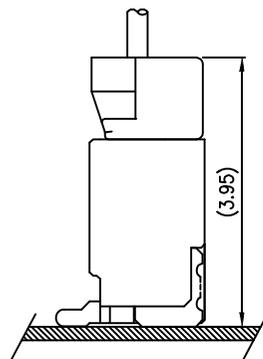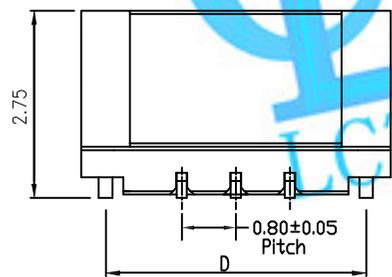


MATE DRAWING

产品5P以下贴Mylar, 5P及以上使用Mylar或盖子依料号编码决定。

PH-0.8-XP-LT

PIN数	DIM A	DIM B	DIM C	DIM D
2	0.80	1.90	3.78	3.04
3	1.60	2.70	4.58	3.84
4	2.40	3.50	5.38	4.64
5	3.20	4.30	6.18	5.44
6	4.00	5.10	6.98	6.24
7	4.80	5.90	7.78	7.04
8	5.60	6.70	8.58	7.84
9	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

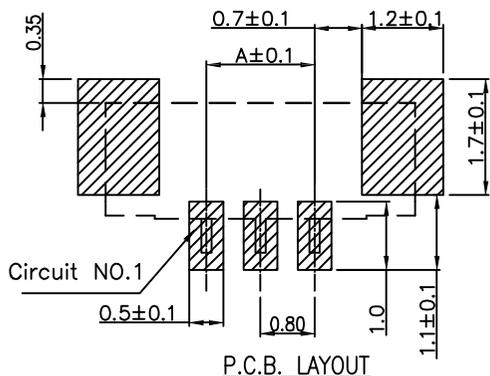

P.C.B. LAYOUT

一般公差
TOLERANCES
 X ±0.5 XX ±0.15
 X ±0.25 XXX ±0.1
 ANGLES ±2°

龍創中業电子科技(东莞)有限公司

品名 (TITLE)
 0.80mm Pitch H=2.75mm Wafer
 CONN.

製圖 (DR)
 *10/08/30

圖號 (DWG.NO)
 PH-0.8-XP-LT

核對 (CHKD)

核准 (APPD)

表面處理 (FINISH)

比例 (SCALE)
 4:1

單位 (UNITS)
 mm

張數 (SHEET)
 1 OF 1

SIZE
 A4

REV
 0

REVISION	DESCRIPTION	DATE	SIGNATURE
△	新圖制成	'10/08/30	