

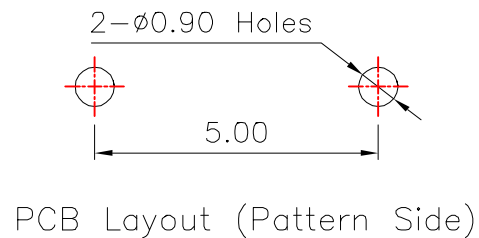




RoHS

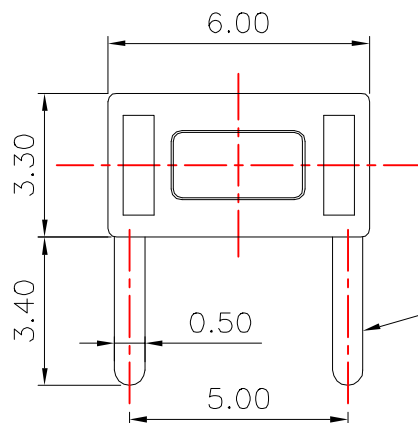

Circuit Diagram

Height(高度) :

NO.1	
PART NO	H
D	3.4
F	5.0

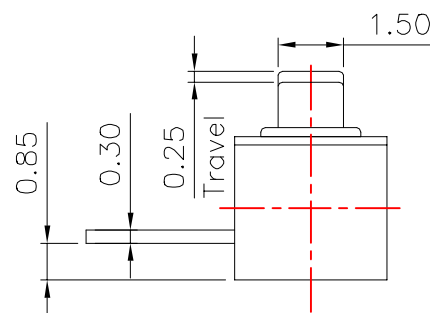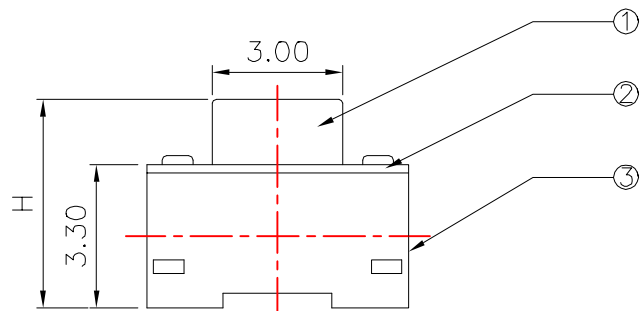

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA			
Contact impedance(接触阻抗):	≤ 100mΩ MAX			
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN			
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s			
OPERATING LIFE(电气寿命):	100,000 cycles			
Usage temperature(使用温度):	-25 to 85			
Operating humidity(使用湿度):	≤ 85% RH			
Trip(行程):	0.25 ± 0.1mm			
Operating force(操作力):	1	90 ± 30gf	2	130 ± 30gf
	3	180 ± 50gf	4	250 ± 50gf
	5	350 ± 50gf	6	

NO.2

public errand (公差) : ± 0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K2-1101DF		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3	ANGLE 0° ± 3°	APPROVAL		DATE		K2-09-2019	
						SCALE		PAGE		1 OF 1	

K2-1101DF - □ - □