

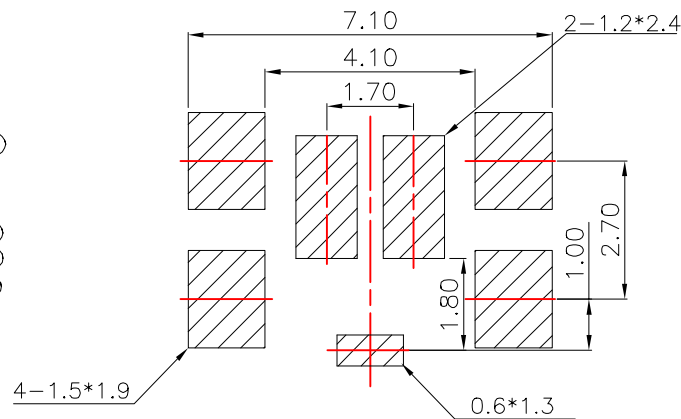




RoHS

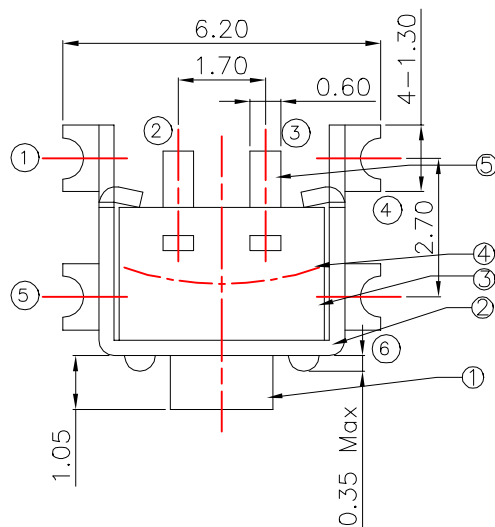

PCB Layout(Pattern Side)



Circuit diagram

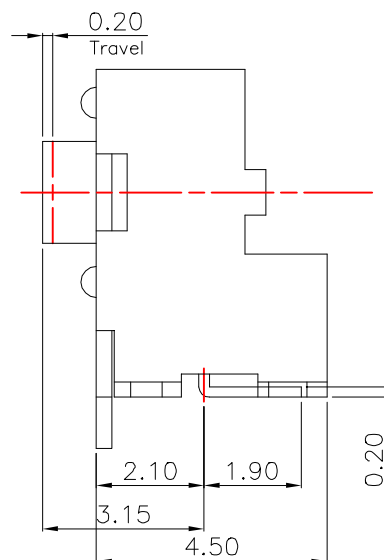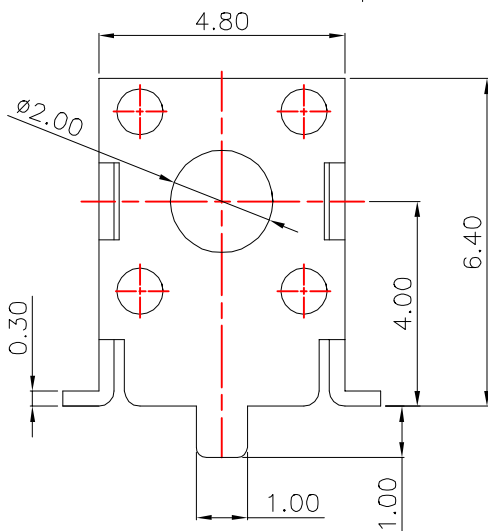

Material:

Button 按钮	PPA/LCP
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA	
Contact impedance(接触阻抗):	≤100mΩMAX	
Insulation impedance(绝缘阻抗):	≥100MΩMIN	
Welding resistance temperature(耐焊温度):	250±5 ° 5s	
OPERATING LIFE (电气寿命):	100,000 cycles	
Usage temperature (使用温度):	-25 °C to 85 °C	
Operating humidity (使用湿度):	≤85% RH	
Trip(行程):	0.20±0.1mm	
Operating force(操作力):	1	90±30gf
	2	130±30gf
	3	180±50gf
	4	250±50gf
NO.1	5	350±50gf
	6	

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K2-1109HW			CHECK	Z.LIU	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K2-09-2019
		ABOVE 5 ~30	±0.3				
mm	OTHERWISE	ABOVE 30	±0.5	0°±3°	SCALE	PAGE	1 OF 1
		ANGLE	±3°				

K2-1109HW-□