




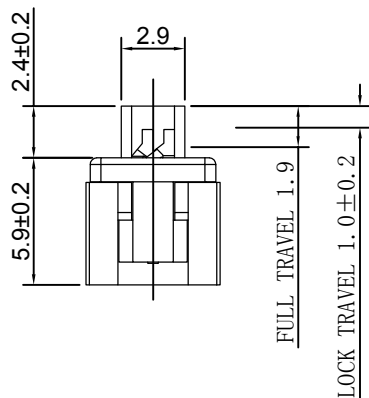






RoHS

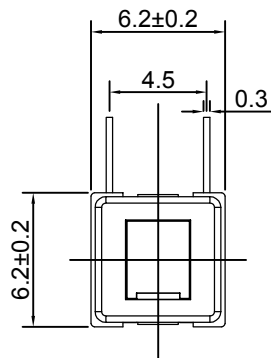

SCHEMATIC



P. C. B LAYOUT



function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

7	TERMINAL	BRASS	6	Ag PLATED
6	CASE	PPA	1	GRAY
5	LOCK PIN	SUS WIRE $\phi 0.35$	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.1A		
Contact impedance(接触阻抗):	$\leq 100m\Omega$ MAX		
Insulation impedance(绝缘阻抗):	$\geq 100M\Omega$ MIN		
Welding resistance temperature(耐焊温度):	$250 \pm 5^{\circ} 5s$		
OPERATING LIFE(电气寿命):	30,000 cycles		
Usage temperature(使用温度):	$-40^{\circ} C$ to $85^{\circ} C$		
Operating humidity(使用湿度):	$\leq 85\%$ RH		
Trip(行程):	$1.5 \pm 0.2mm$		
Operating force(操作力):	1	2	
	3	4	180±50gf
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-5851DCA		CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	ANGLE	APPROVAL	DATE	K8-09-2019
mm	OTHERWISE	ABOVE 5 ~30	$\phi \pm 3^{\circ}$	SCALE	PAGE	1 OF 1
		± 0.2				
		± 0.3				
		± 0.5				
		$\pm 3^{\circ}$				

K8-5851DCA-□-□