
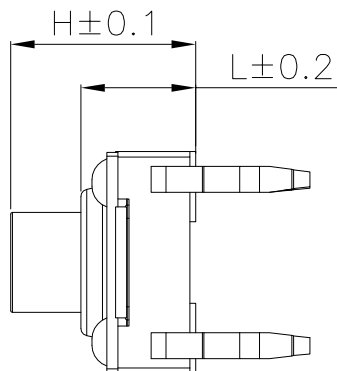


RoHS

4 8

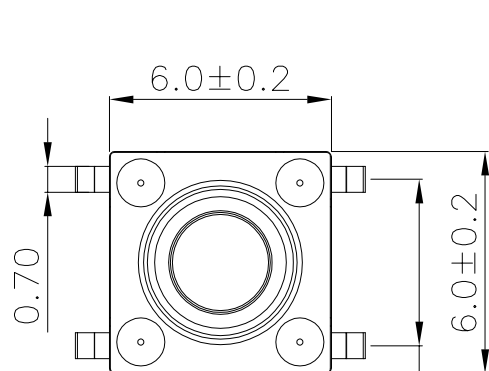

Height(高度) :

NO.1			
PART NO	H	L	Keystoke
B	3.3	2.8	Black
A	4.3	3.15	Red
C	5.0		
G	7.0		
H	4.5		



Material: 防水等级IP67

Button 按钮	PPA/LCP
Cover plate 盖板	铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA		
Contact impedance(接触阻抗):	≤100mΩMAX		
Insulation impedance(绝缘阻抗):	≥100MΩMIN		
Welding resistance temperature(耐焊温度):	250±5 ° 5s		
OPERATING LIFE(电气寿命):	100,000 cycles		
Usage temperature(使用温度):	-25 °C to 85 °C		
Operating humidity(使用湿度):	≤85% RH		
Trip(行程):	0.3±0.1mm		
Operating force(操作力):	1	90±30gf	2
	3	180±50gf	4
	5	350±50gf	6

NO.2

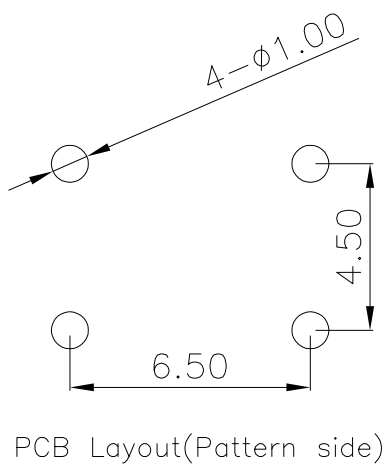

Circuit Diagram

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K2-1110DP		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE 0°±3°	APPROVAL		DATE		K2-09-2019	
						SCALE		PAGE		1 OF 1	

K2-1110DP-□-□