

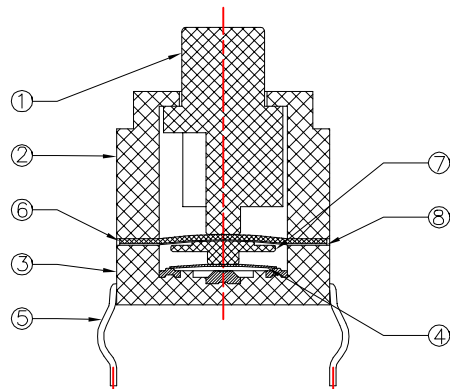


RoHS



PCB Layout(Pattern side)

Height(高度) :

NO.1	
PART NO	H
S	13
T	13.5
U	14
V	15
W	16
X	17
Y	18
Z	19
1	15.5
2	16.5
3	14.5
4	17.5
5	23.0

Material:

Button 按钮	PBT/LCP耐温280°C
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PBT/LCP耐温280°C
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA			
Contact impedance(接触阻抗):	≤100mΩ MAX			
Insulation impedance(绝缘阻抗):	≥100MΩ MIN			
Welding resistance temperature (耐焊温度):	250±5 ° 5s			
OPERATING LIFE (电气寿命):	100,000 cycles			
Usage temperature (使用温度):	-25 °C to 85 °C			
Operating humidity (使用湿度):	≤85% RH			
Trip(行程):	0.2±0.05mm			
Operating force(操作力):	1	90±30gf	2	130±30gf
	3	180±50gf	4	250±50gf
	5	350±50gf	6	

NO.2

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING	G.L CHEN	DWG.No.	LCZY			
PART NO.		K2-1844DP				CHECK	Z.LIU	REV.	A1			
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	K2-09-2019			
	mm		ABOVE 5 ~30	±0.3		0°±3°		SCALE		2:1	PAGE	1 OF 1
			ABOVE 30	±0.5								
			ANGLE	±3°								

K2-1844DP-□-□