



NOTE:

1. Rating 1: DC 12V 0.1A
2. Operating force: 200gf MAX
3. Operating Temp: -40 °C ~ +85 °C
4. Mechanical Life: 200,000
5. Ingress protection: IP67



Mounting Holes





Circuit Diagram

⑧	Rotator	—	1	POM	—	—
⑦	Spring	—	1	SUS	Plating silver	—
⑥	Contact	—	1	Cu Alloy	—	—
⑤	Sealed Circle	—	1	Silicone Rubber	—	—
④	Terminal	—	3	Cu Alloy	Plating silver	—
③	Lever	—	1	POM	Black	—
②	Case	—	1	PA	Black	—
①	Cover	—	1	PA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK


APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.09.3				
CHECKED				TITLE:	MICRO SWITCHS	
APPROVALS				PART NO.	K9-1268-01	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15	±2'	DRAWING NO.	PROJ:
		~ 5	±0.10			

_____	A	_____	NEW	_____	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

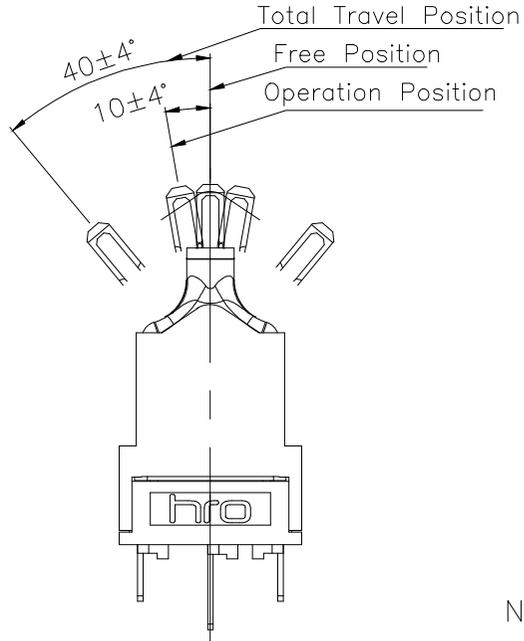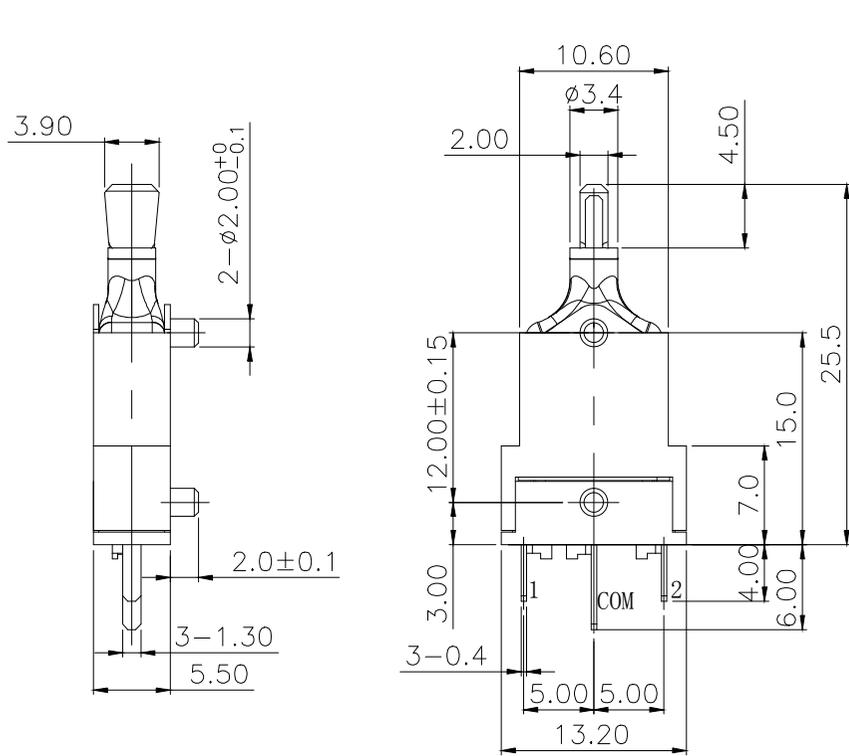


NOTE:

- 1.Rating1:DC12V 0.1A
- 2.Operating force:200gf MAX
- 3.Operating Temp:-40 °C ~+85 °C
- 4.Mechanical Life:200,000
- 5.Ingress protection:IP67



Mounting Holes



Circuit Diagram

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Rotator	—	1	POM	—	—
⑦	Spring	—	1	SUS	Plating silver	—
⑥	Contact	—	1	Cu Alloy	—	—
⑤	Sealed Circle	—	1	Silicone Rubber	—	—
④	Terminal	—	3	Cu Alloy	Plating silver	—
③	Lever	—	1	POM	Black	—
②	Case	—	1	PA	Black	—
①	Cover	—	1	PA	Black	—

APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.09.3		TITLE:	MICRO SWITCHS	
CHECKED				PART NO.	K9-1268-02	
APPROVALS				TOLERANCES ARE	ANGLE	UNIT: mm SCALE: 1:1 PROJ:
		30~以上	± 0.30	±2°	DRAWING NO.	SHEET 1 OF 1
		10~30	± 0.20			
		5~10	± 0.15			
		~ 5	± 0.10			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			