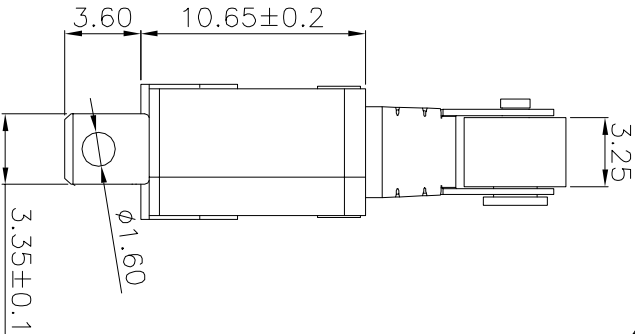
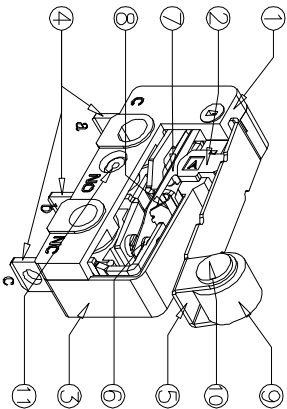

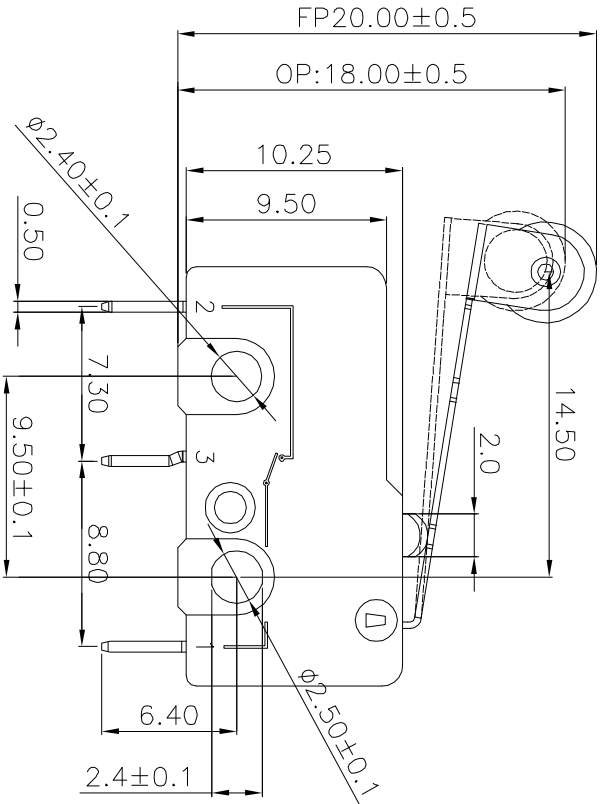
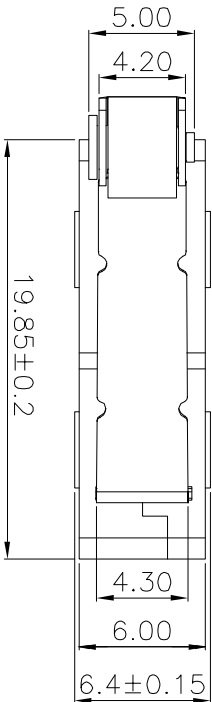


Circuit Diagram

NOTE:
1.Rating:AC125V 5A/250V 3A
2.Operating froce:30±10gf
3.Mechanical Life:1,000,000
3.Electrical Life:6000-10,000

①	Aluminum rivet	—	1	Aluminum Alloy	—	—
⑩	Spindle	—	1	Brass	Plating Nicke	—
⑨	Roller	—	1	Brass	Plating Nicke	—
⑧	Shrapnel 2	—	1	Copper Alloy	—	—
⑦	Shrapnel 1	—	1	Beryllium Copper	—	—
⑥	Contact	—	1	Copper Alloy	Plating silver	—
⑤	Lever	—	1	Stainess Steel	—	—
④	Terminal	—	3	Copper Alloy	Plating silver	—
③	Housing	—	1	PBT	Black	—
②	Knob	—	1	PBT	Black	—
①	Cover	—	1	PBT	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

				Circuit Diagram			