

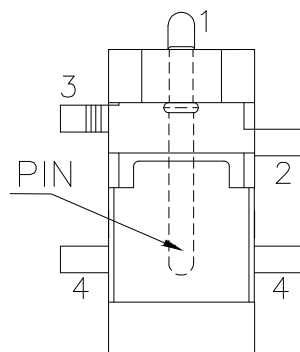
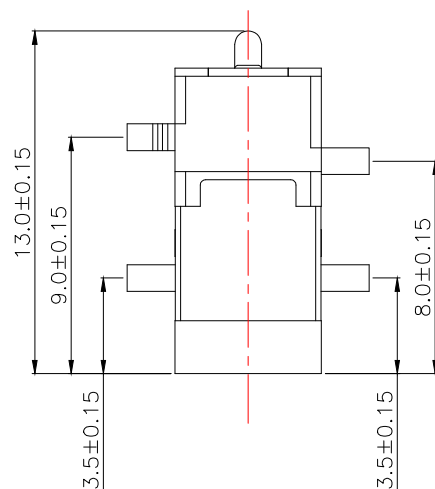
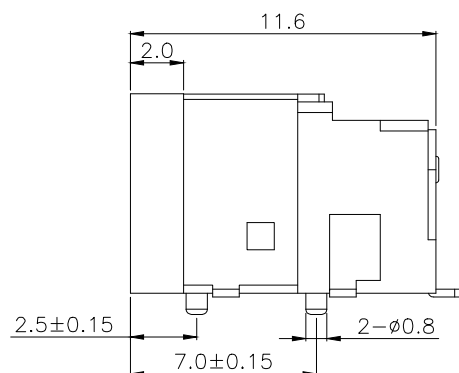


RoHS




P.C.B LAYOUT(Copper-side view)

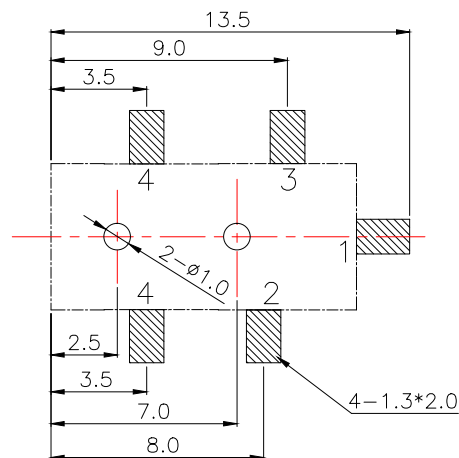

Model No.	DC-002A-10A	DC-002A-13A	DC-002A-165A
PIN	φ1.0	φ1.3	φ1.65

CIRCUIT DIAGRAM



Material:

contact pin插针	Au
plastic cement塑胶	Nylon尼龙/PA46
Pin 引脚	Au
CONTACT A(P脚A)	Au

Main technical specifications:

Rated load(额定负荷):	DC30V 0.5A
Contact impedance(接触阻抗):	≤100mΩMAX
Insulation impedance(绝缘阻抗):	≥100MΩMIN
Welding resistance temperature(耐焊温度):	250±5 ° 5s
OPERATING LIFE(电气寿命):	5,000 cycles
Usage temperature(使用温度):	-20 °C to 70 °C
Operating humidity(使用湿度):	≤85% RH
Insertion and Extraction Force(插拔力)	3~20N

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

public errand (公差) : ±0.2mm unit (单位) : mm

PART NAME	DC JACK			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	DC-002A			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	APPROVAL	DATE	PAGE	DC-09-2019
	mm	OTHERWISE	ABOVE 5 ~30				
			±0.2 ±0.3 ±0.5 ±3	ANGLE 0°~3°	2:1	1 OF 1	

DC-002A-□