

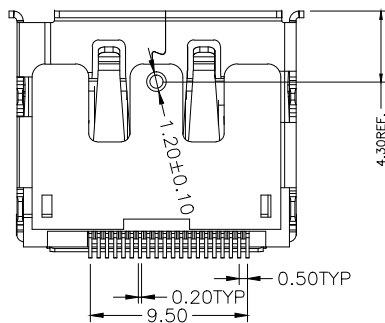
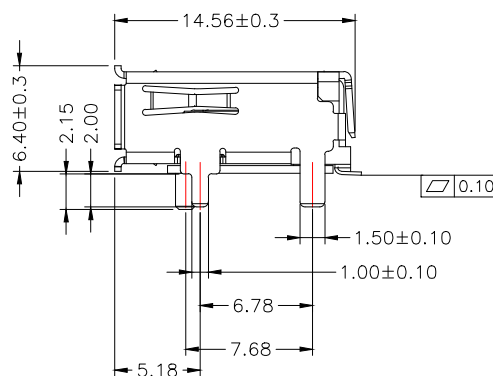
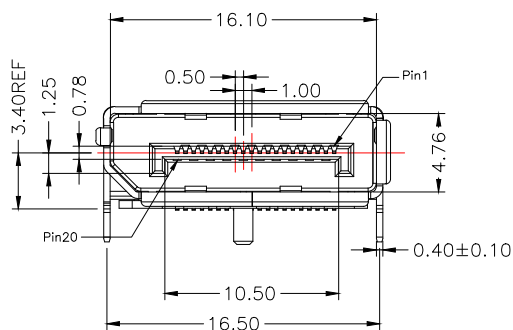
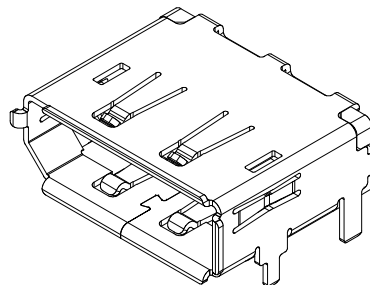


ROHS

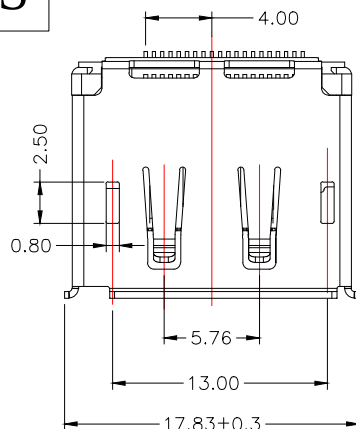

- NOTE:
- 1.MECHANICAL CHARACTERISTICS
- 1.1 RATING CURRENT: 0.5A
- 1.2 RATING VOLTAGE: 40V
- 1.3 CONTACT RESISTANCE: 40 mΩ MAX
- 1.4 INSULATION RESISTANCE:
- a, UNMATED: 100MΩ MIN AT 500 VDC
- b, MATED: 10M OHMS MIN AT 150 VDC
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE
- 1.6 DURABILITY: 10000 CYCLES.
- 1.7 OPERATING TEMPERATURE: -20°C--+85°C
- 1.8 STORAGE TEMPERATURE: -20°C--+65°C

- 2.NOTES:
- 2.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 2.2 RESISTANCE TO SOLDERING HEAT: 260°C FOR 10 SECONDS.

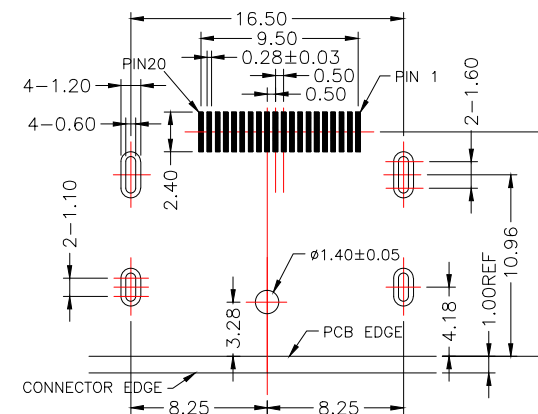

RECOMMENDED P.C.B. LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

④	Cover	—	1	LCP	Black	—
③	Shell	—	1	Brass(T=0.4)	Ni Plated	—
②	Contact	—	20	Brass(T=0.2)	Au/Ni Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.09.3				
CHECKED				TITLE:	DP CONNECTOR	
APPROVALS				PART NO.	U-H-20DD-Y-1	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15	±2'	DRAWING NO.		SHEET 1 OF 1

—	B	—	NEW	—	—	—
—	A	—	—	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.