
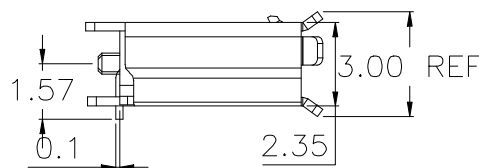
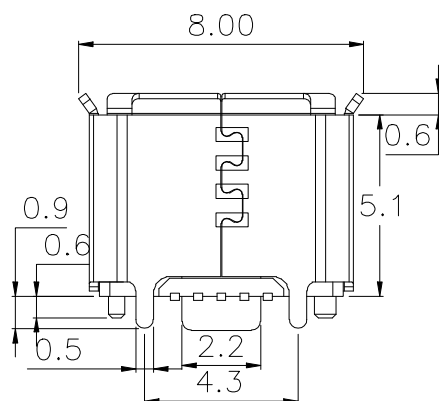
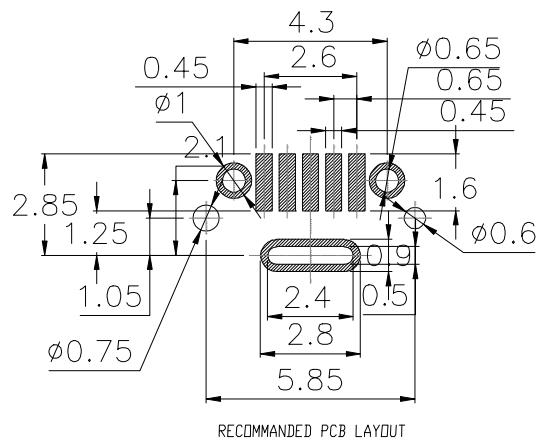
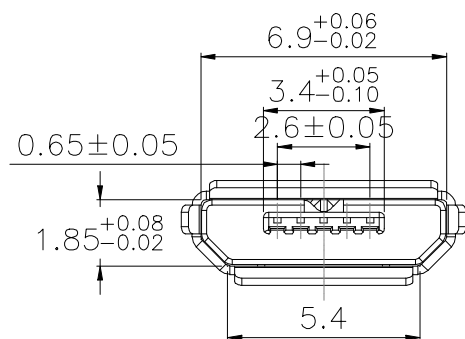
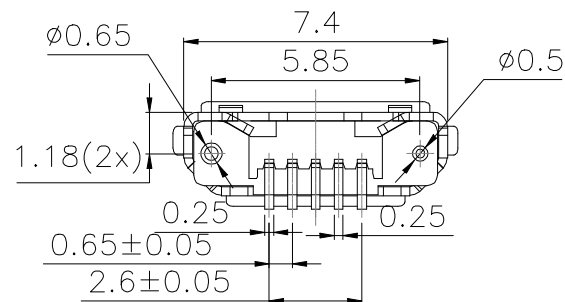


ROHS

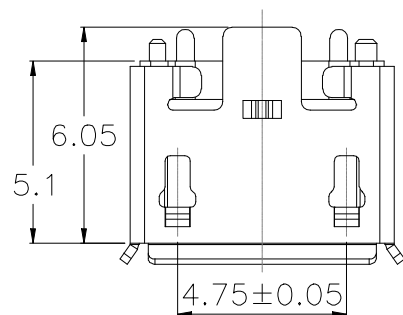

NOTES:

1.Specifications

- 1-1.INSERT FORCE:35N MAX.
- 1-2.WITHDRAW FORCE:10N MIN.INITIAL 8-20N AFTER
- 1-3.Current rating:1.0A
- 1-4.Voltage Rating:30V
- 1-5.Life Test:10000 CYCLES MIN.
- 1-6.:Dielectric withstanding:voltage100V AC MIN.
- 1-7.Contact resistance:30mΩ MAX.INITIAL;40mΩ MAX AFTER
- 1-8.Insulation resistance:100MΩ MIN
- 1-9.Temperature range:-30°TO +80°

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.09.3				
CHECKED			TITLE:	MICRO 5P F 立式180度 SMT 贴板有边有柱±5.1MM		
APPROVALS			PART NO.	U-D-M5DS-Y-3		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
			±2'	DRAWING NO.		SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			