
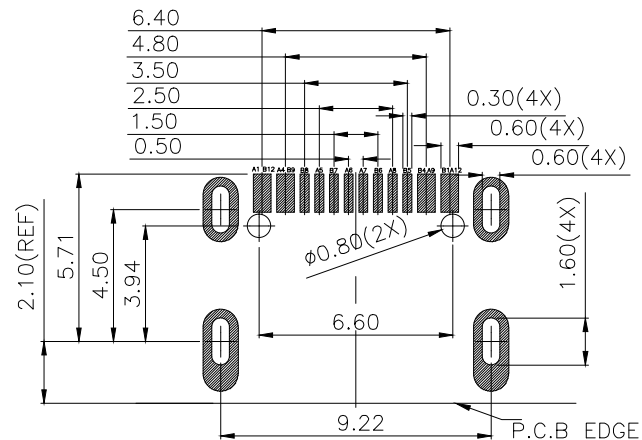
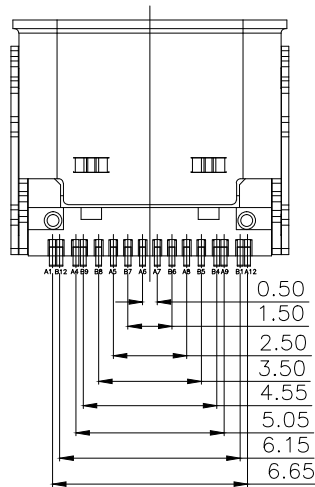
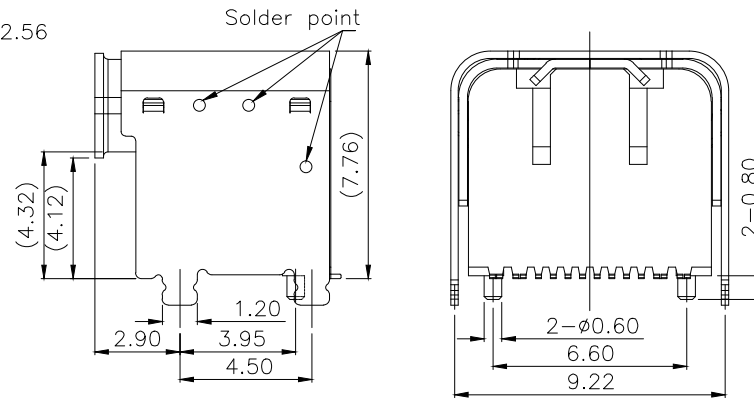
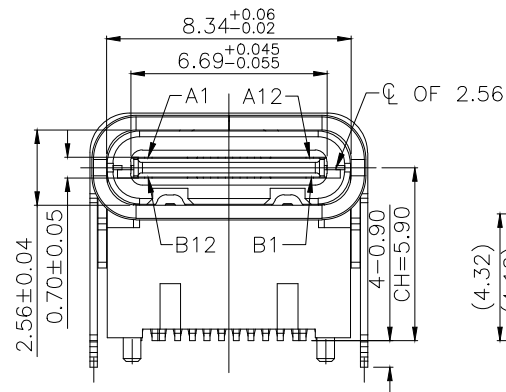
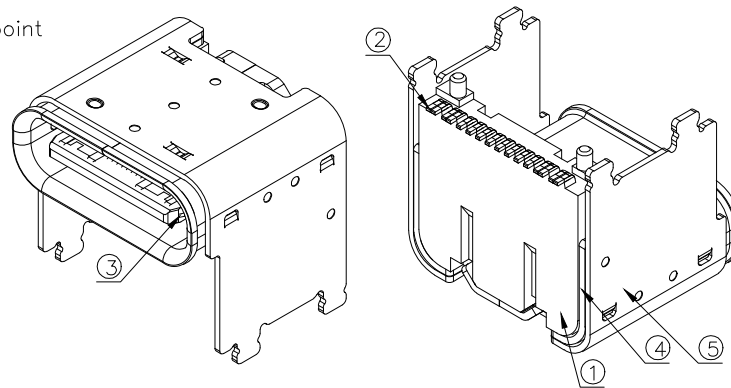


ROHS

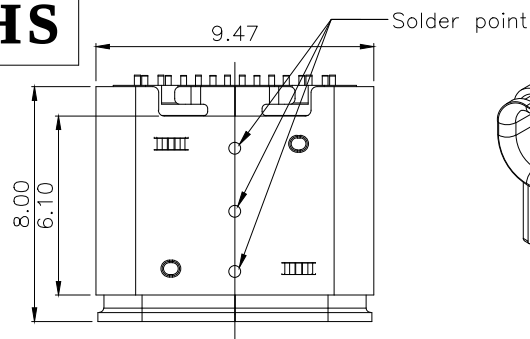

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

NOTE:

1.MATERIAL SPECIFICATION:

- 1.HOUSING: PA10T, UL94 V-0.
- 2.CONTACTS: C2680, T=0.15mm
- 3.MID PLATE: SUS301, T=0.15mm
- 4.INSIDE SHELL: SUS304, T=0.30mm
- 5.OUTSIDE SHELL: SUS304, T=0.25mm

2.PLATING SPECIFICATION:

2-1.CONTACTS:

Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
GOLD FLASH PLATING ON SOLDER AREA

2-2.INSIDE SHELL OR OUTSIDE SHELL:

Ni 30u" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE,

- 3-1.INSERTION FORCE: 0.5~2.0kgf.
- 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
- 3-3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE,

- 4-1. CURRENT RATING: 5A
VOLTAGE RATING: 5V

4-2.INSULATION RESISTANCE: 100M Ω MIN

4-3.DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.


4-4.LOW CONTACT RESISTANCE: INITIAL 40M Ω / AFTER 50M Ω

5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -30°C~+80°C.

6.IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

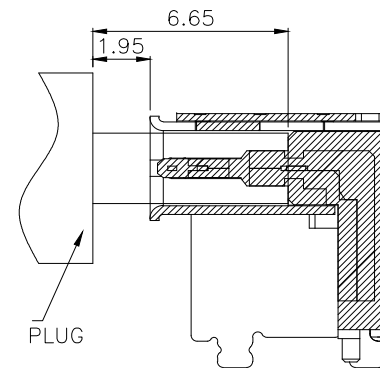

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12			
CHECKED			TITLE:	USB CONNECTOR	
APPROVALS			PART NO.	TYPE-C-31-M-26	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
	10~30	±0.25			
	5~10	±0.20			
	~ 5	±0.15			
			±2'	DRAWING NO.	
					PROJ:
					SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			