
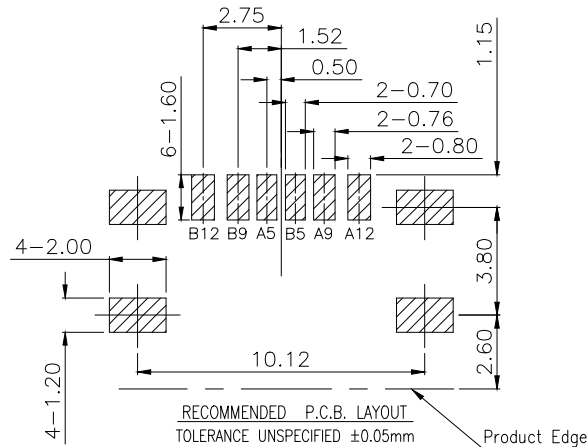
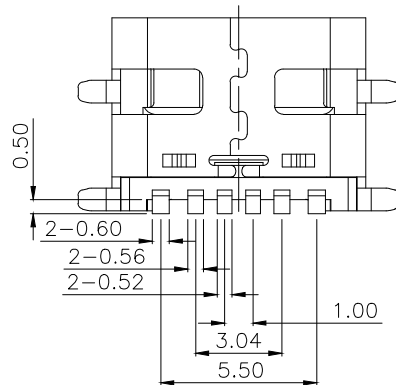


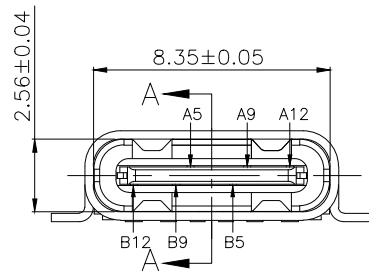




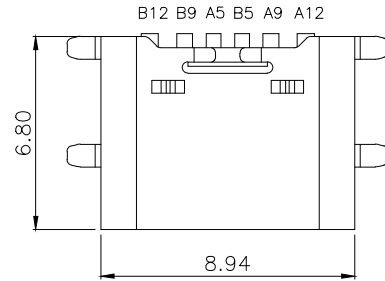

TYPE C USB 参数要求:

1. 材料要求

1.1 胶芯材料: LCP

1.2 外壳材料: SUS304

1.3 端子材料: C2680

2. 电气性能

2.1 额定电流: 3A

2.2 额定电压: 5V

2.3 耐压: 500V (AC) for 1min

2.4 接触阻抗: 40mΩ Max

2.5 绝缘阻抗: 100mΩ Min

3. 机械性能

3.1 插入力: 5-20N

拔出力: 6-20N

3.2 推力: 50N Min

3.3 剥离强度: 150N Min

3.4 机械寿命: 10000cycles

4. 盐雾要求: 24H

5. 工作温度: -20° C~+85° C.

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12				
CHECKED				TITLE:	USB CONNECTOR	
APPROVALS				PART NO.	TYPE-C-31-M-29	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15				
		±2°	DRAWING NO.	_____	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			