
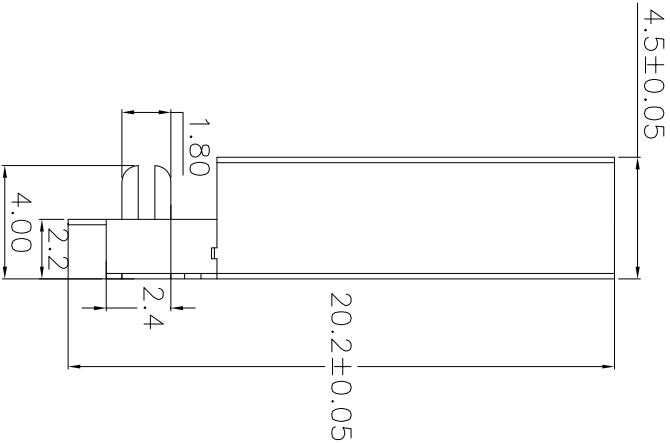
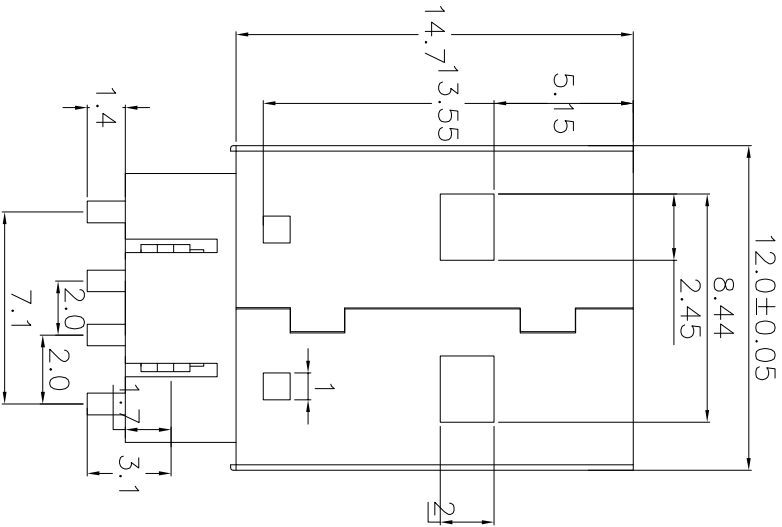
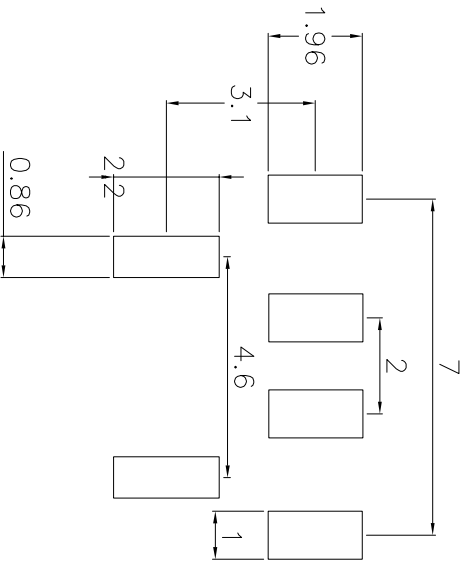
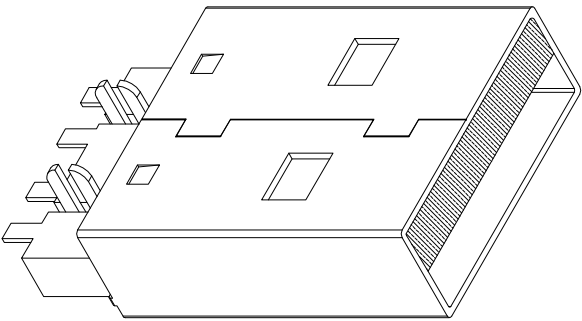


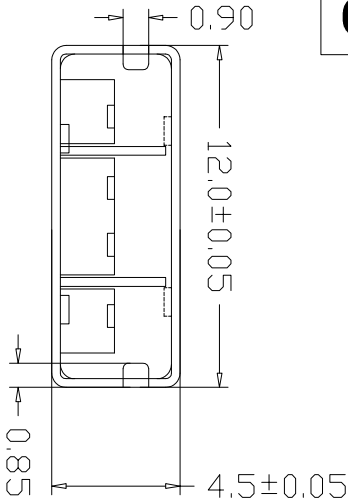

NOTE:

1.MATERIAL:

- a.HOUSING:PBT GLASS FIBRE UL94V-0;
- b.CONTACT: BRASS T=0.25mm
- c.SURFACE PLATING:AU1u"+Sn80-100u"+Ni60u")
- c.SHEEL:SPCC-SD-DILED.T=0.3mm
- c.SURFACE PLATING:CU50-80u",Ni50-80u;-

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIDHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA DHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE MIN LEVEL
- d.OPERATING TEMPERATURE: -55'-85'

PART NO.	
U-G-04WS-W-05	U-G-04WS-W-06
Housing & Black	Housing & White

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12	TITLE: USB 2.0 公头			
CHECKED						
APPROVALS			PART NO.			
TOLERANCES ARE			30~0.1±	±0.30	ANGLE	UNIT: mm
			10~30	±0.20		SCALE: 1:1
			5~10	±0.15	±2'	DRAWING NO.
			~ 5	±0.10		PROJ: 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			