
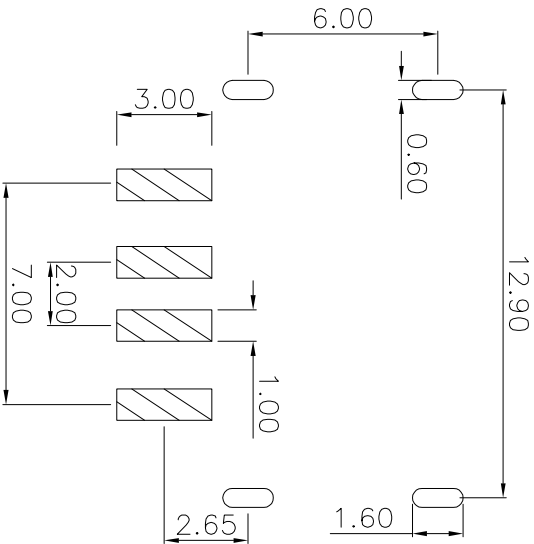
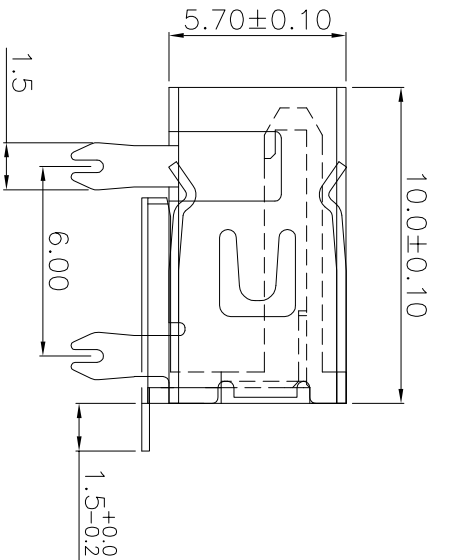
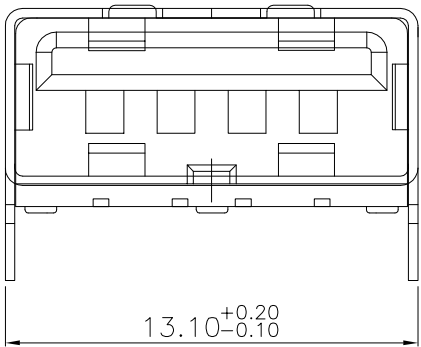


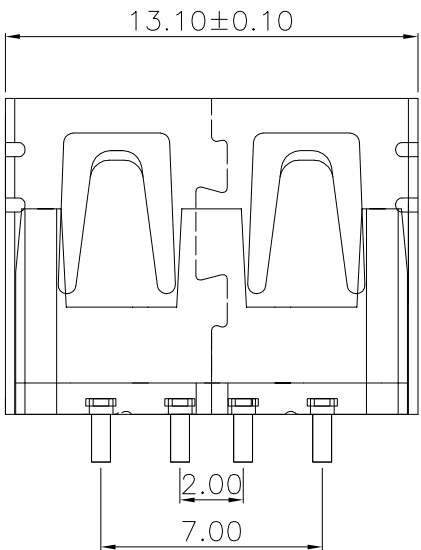

RECOMMENDED P.C.B. LAYOUT

电气特性:Electrical:

- 1. 额定电流: Current Rating 1.5A/contact terminal
- 2. 额定电压: Voltage Rating 30V DC
- 3. 接触电阻: Contact Resistance 30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage: 500 V AC AT Sea Level
- 5. 绝缘电阻: Insulation Resistance: 1000MEGA ohms MIN

物理性能:Mechanical:

- 1. 插拔力: Cnector Mate and Ummate Force Mate force:3.57kgf(MAX) Ummate force:1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention 1.0kgf(MIN)

③	Base	—	1	PAGT	White/black
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	BRASS	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
DRAWN		S.L.L		2019.10.12	
CHECKED		TITLE:		USB CONNECTOR	
APPROVALS		PART NO.		U-A-24DD-W-14	
TOLERANCES ARE		30~以上	±0.30	ANGLE	SCALE: 1:1
		10~30	±0.25		PROJ: 1 OF 1
		5~10	±0.20	UNIT: mm	
		~ 5	±0.15	DRAWING NO.	
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		
			CHANGE.		
			CHECK.		
			APPRO.		