

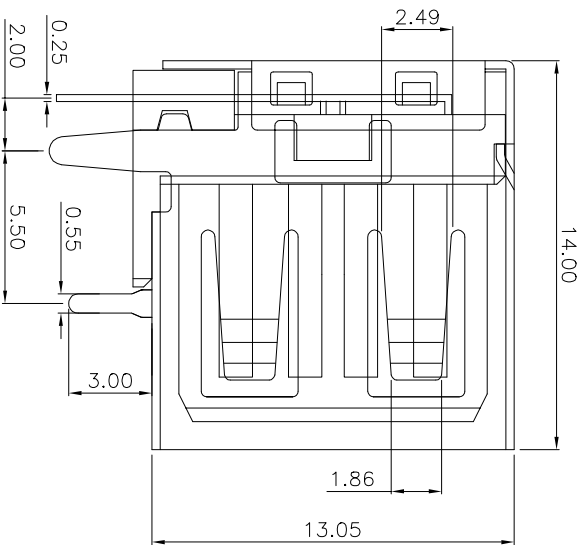
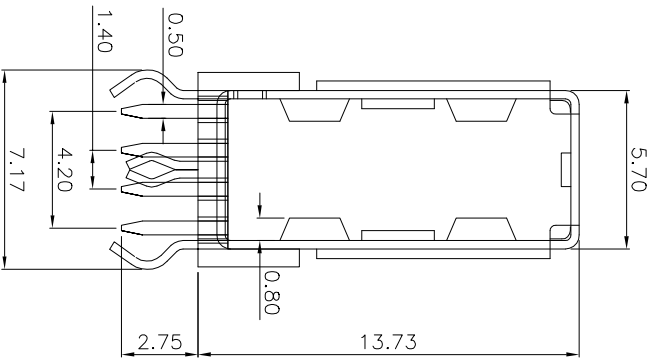


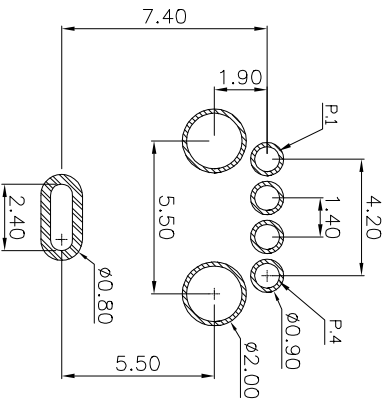

NO.1	
PART NO	NOTE
U-A-24D1-W-7	black
U-A-24D2-W-7	White

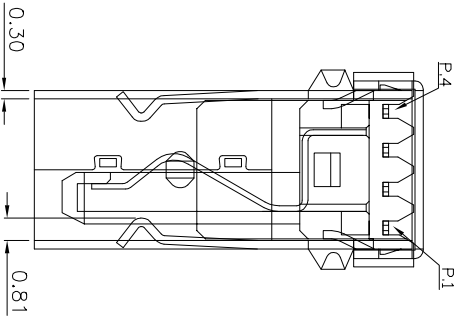

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.插拔力: Connector Mate and Umate Force
Mate force:3.75kgf(MAX)
Umate force:1.02kgf(MIN)

③	Base	—	1	NY66	White/black
②	Terminal	—	8	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
DRAWN	S.L.L	2019.10.12		

CHECKED		TITLE:		USB CONNECTOR	
APPROVALS		PART NO.			
TOLERANCES ARE		30~Ø以上 10~30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE ±2°	UNIT: mm SCALE: 1:1 PROJ: SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		
			CHANGE.	CHECK.	APPRO.