

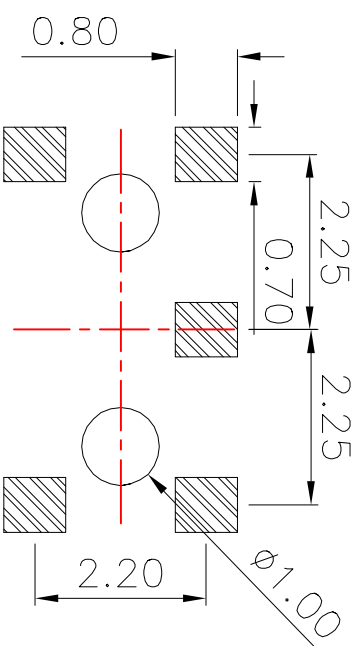
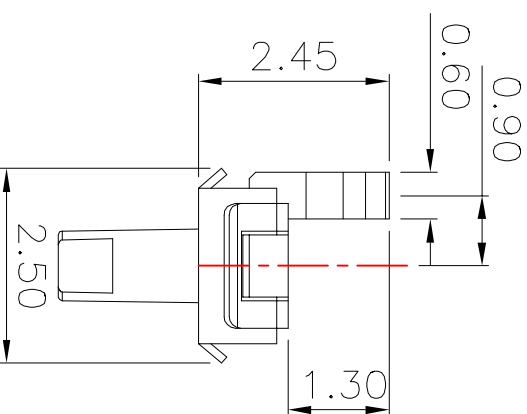
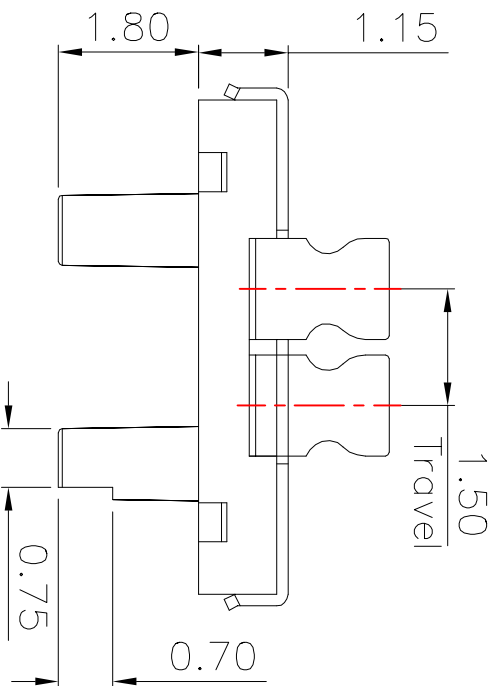

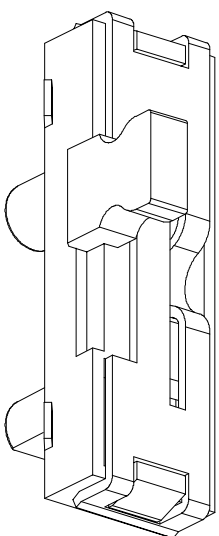


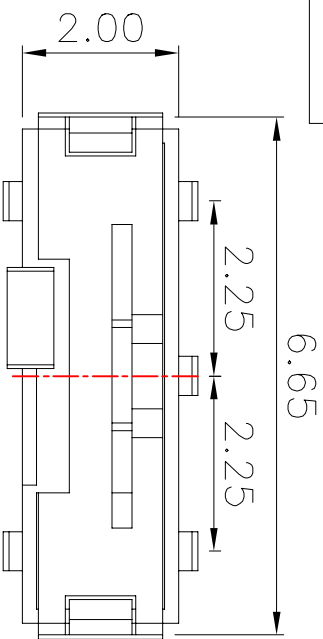

PCB Layout(Pattern side)

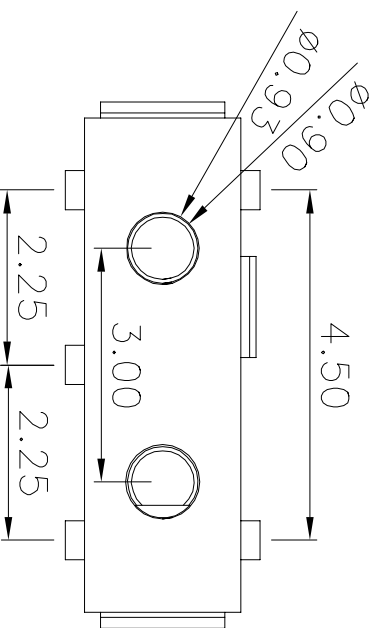

- Note:
1. Rating : DC 12V 50mA
 2. Contact Resistance :≤50mΩ
 3. Insulation Resistance: DC500V 1Minute
 4. Operating Temperature Range: -25℃+80℃
 5. Ambient Humidity Used: ≤85%RH
 6. Operating Force : 150±80gf
 7. Operating Life : 50,000Cycles

⑤		Contact Spring	—	1	Beryol	Ag Plated	—		
④		Terminal	—	5	Phosphor Bronze	Ag Plated	—		
③		Base	—	1	LCP	Black	—		
②		Cover	—	1	SUS	Natural	—		
①		Knob	—	1	PA46	RED	—		
ITEM		PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD				
DRAWN		S.L.L	2020.1.03		TITLE: TOGGLE SWITCHES				
CHECKED					PART NO. K3-1288S				
APPROVALS					SCALE: 1:1				
TOLERANCES ARE		30~12.5 ±0.30	10~30 ±0.20	ANGLE	UNIT: mm	PROJ.			
		5~10 ±0.15	~5 ±0.10	±2°	DRAWING NO.	SHEET 1 OF 1			
ECN NO.		REV.	DATE.		DESCRIPTION.				
		A			NEW				