

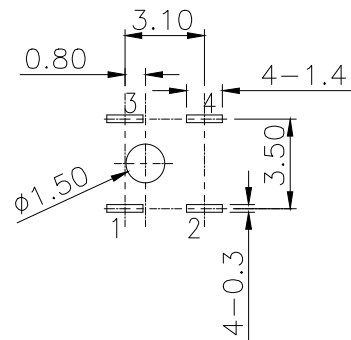
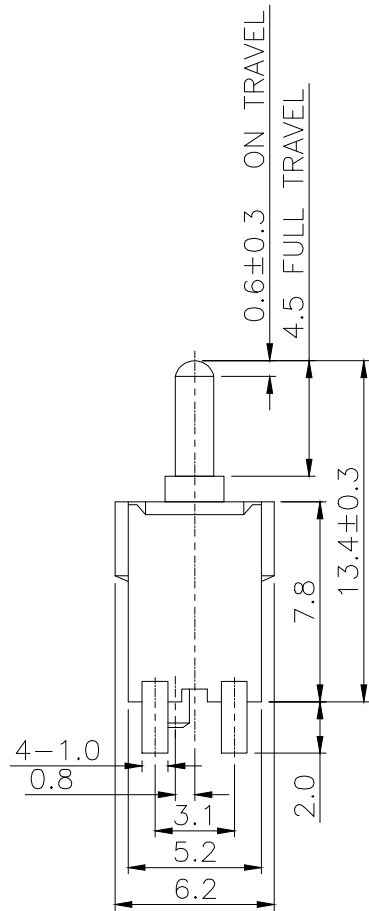




Recommended PAD Layout $\Phi \pm 0.05$

TOP VIEW

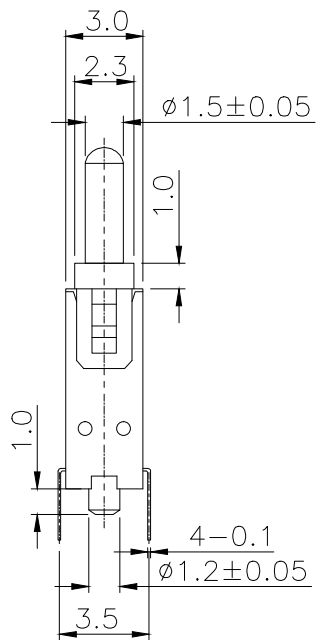




CIRCUIT DIAGRAM

NOTE:


Rating: DC 30V 100mA
Operating Force: 100 ± 30 gf
Lifetime: 50,000 Cycles

⑤	Cover	——	1	PA66	Black	———	
⑥	Spring	——	1	SUS	Natural	———	
④	Contact	——	1	PBS	Ag Clad	———	
③	Terminal	——	4	PBS	Ag Plated	———	
②	Slider	——	1	PA66	Yellow	———	
①	Housing	——	1	PA66	Black	———	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN		S.L.L	2020.1.05				
CHECKED				TITLE:	DETECTOR SWITCHS		
APPROVALS				PART NO.	K5-1676DA-01		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2°	DRAWING NO.	———	SHEET 1 OF 1		

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

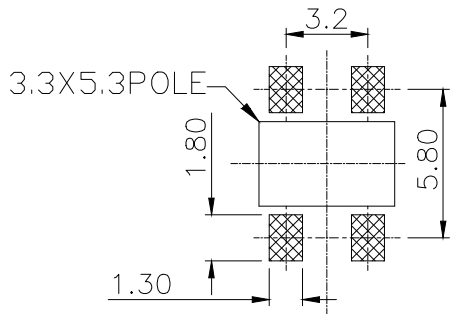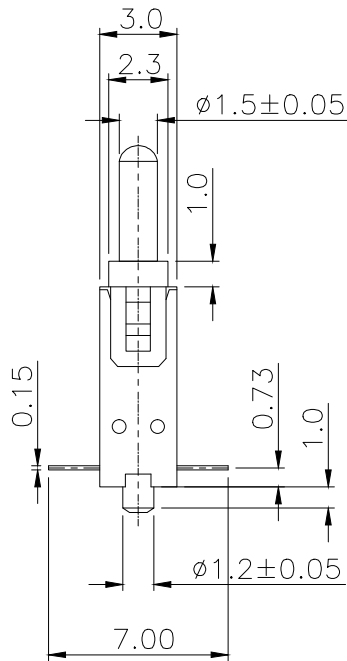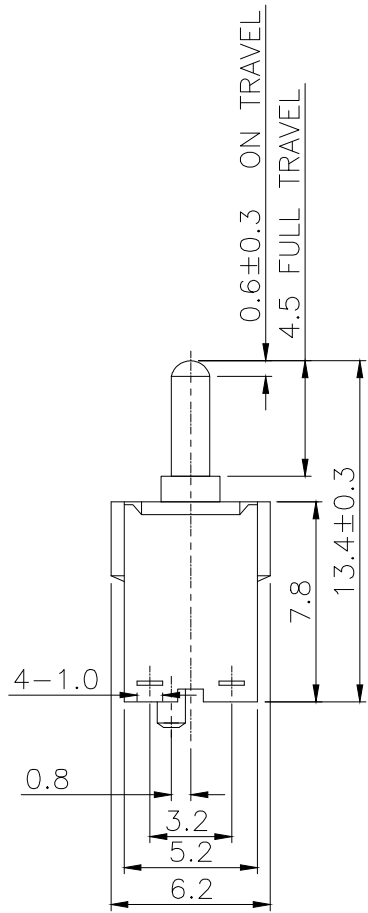

Recommended PAD Layout $\Phi \pm 0.05$
TOP VIEW



CIRCUIT DIAGRAM

NOTE:
Rating: DC 30V 100mA
Operating Force: 100 ± 30 gf
Lifetime: 50,000 Cycles

⑥	Terminal	—	4	Brass	Ag Plated	—
⑤	Case	—	1	PA66	Black	—
④	Spring	—	1	SUS	Natural	—
③	Contact	—	1	PBS strip	Ag Clad	—
②	Button	—	1	PA66	Yellow	—
①	Cover	—	1	PA66	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L		2020.1.05				
CHECKED				TITLE:		DETECTOR SWITCHS	
APPROVALS				PART NO.		K5—1676SA—01	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2'	DRAWING NO.	_____	SHEET 1 OF 1	

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.