

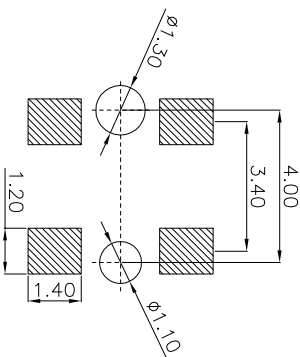
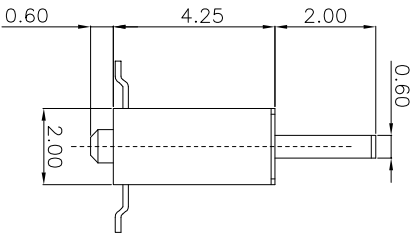
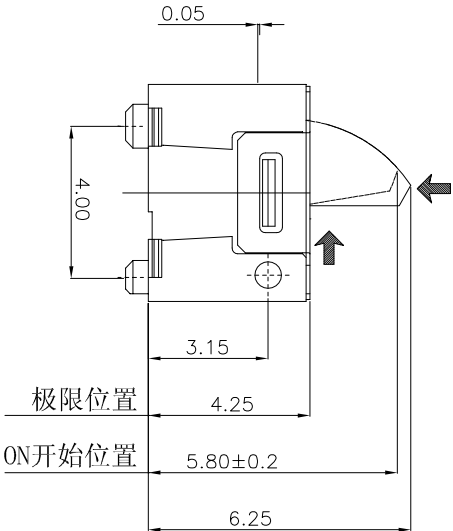


动作方向



PCB LAND DIMENSION



技术要求:

1. 额定负荷: DC 12V 50mA
2. 绝缘电阻: $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度: $-10^{\circ} \sim +60^{\circ}$
6. 相对湿度: $40^{\circ}C \leq 95\%$
7. 接触电阻: $\leq 100M\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: 30gf



CIRCUIT DIAGRAM

⑤	Contact Spring	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	SUS	Black	—
①	Knob	—	1	POM	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2020.1.05				

						CHECKED		TITLE:		DETECTOR SWITCHS				
						APPROVALS		PART NO.		K5-1673SA-01				
						TOLERANCES ARE		30~0.15 10~0.30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROL. 	
A		NEW												
ECN NO.		REV.		DATE.		DESCRIPTION.		CHANGE.		CHECK.		APPRO.		