
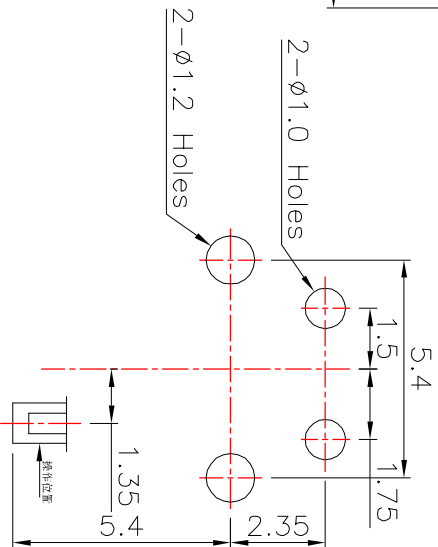
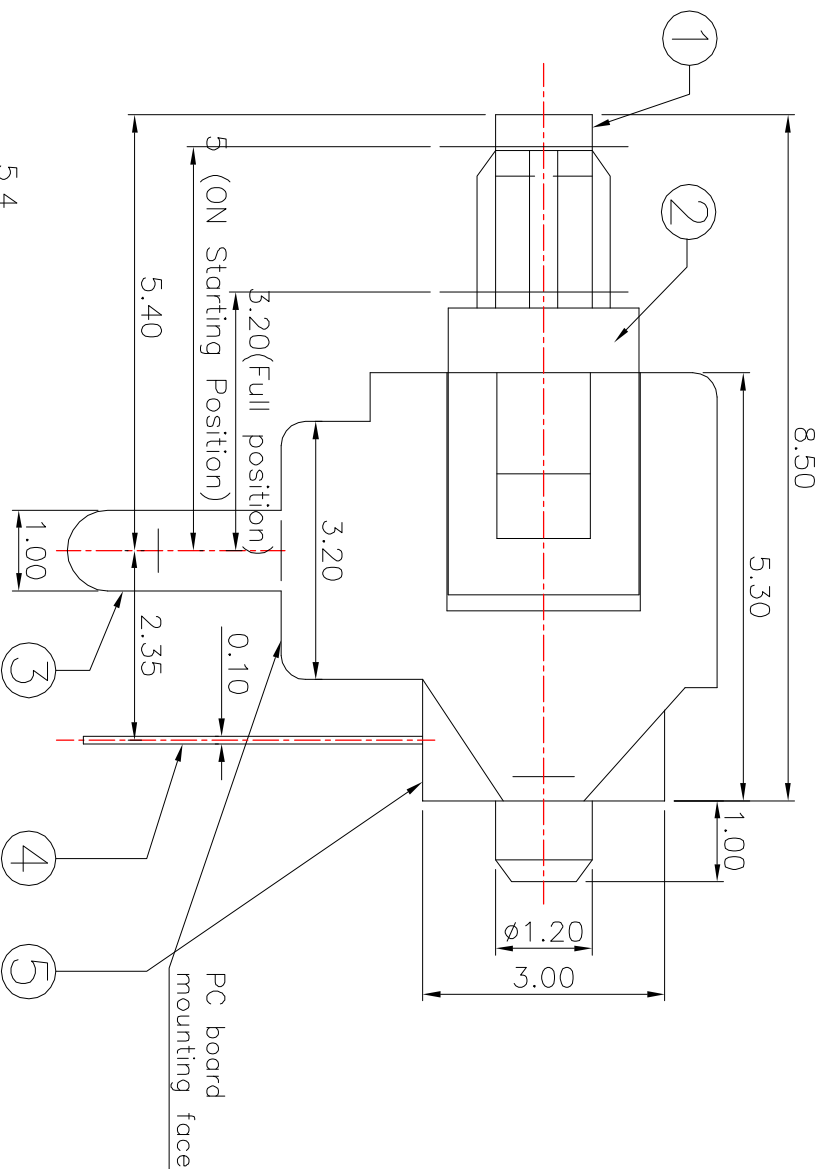



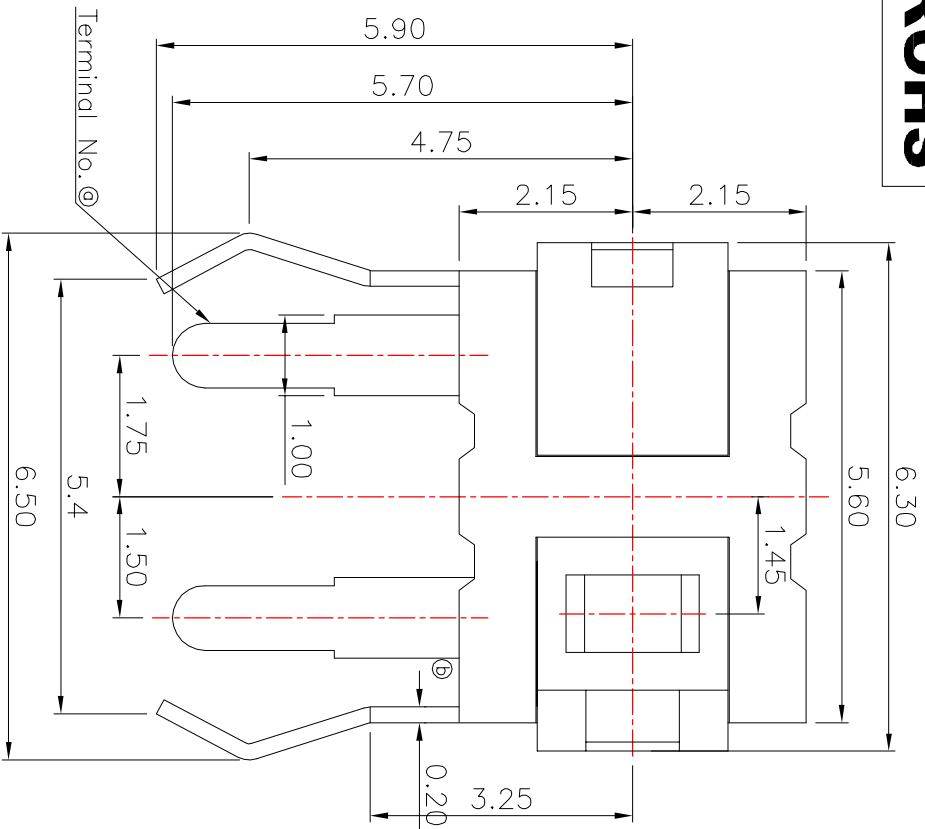

NOTE:
Rating: DC 30V 0.1A
Operating Force: 40±10gf
Lifetime: 100,000 Cycles

⑥	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
⑤	Base	—	1	NYLON	Black	—
④	Terminal	—	2	Phosphor Bronze	Ag Plated	—
③	Trestle	—	1	SPCC	Ni Plated	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

PCB Layout(Pattern side)
Scale: 1 : 2

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—
APPROVALS						
DRAWN			S.L.L	DATE		
CHECKED			2020.1.05	TITLE:		
APPROVALS			30~以上 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	PART NO.
TOLERANCES ARE			~ 5	±2'	UNIT: mm	SCALE: 1:1
					DRAWING NO.	PROJ. ⑥
						SHEET 1 OF 1

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

DETECTOR SWITCHES

K5-1120AA-02