


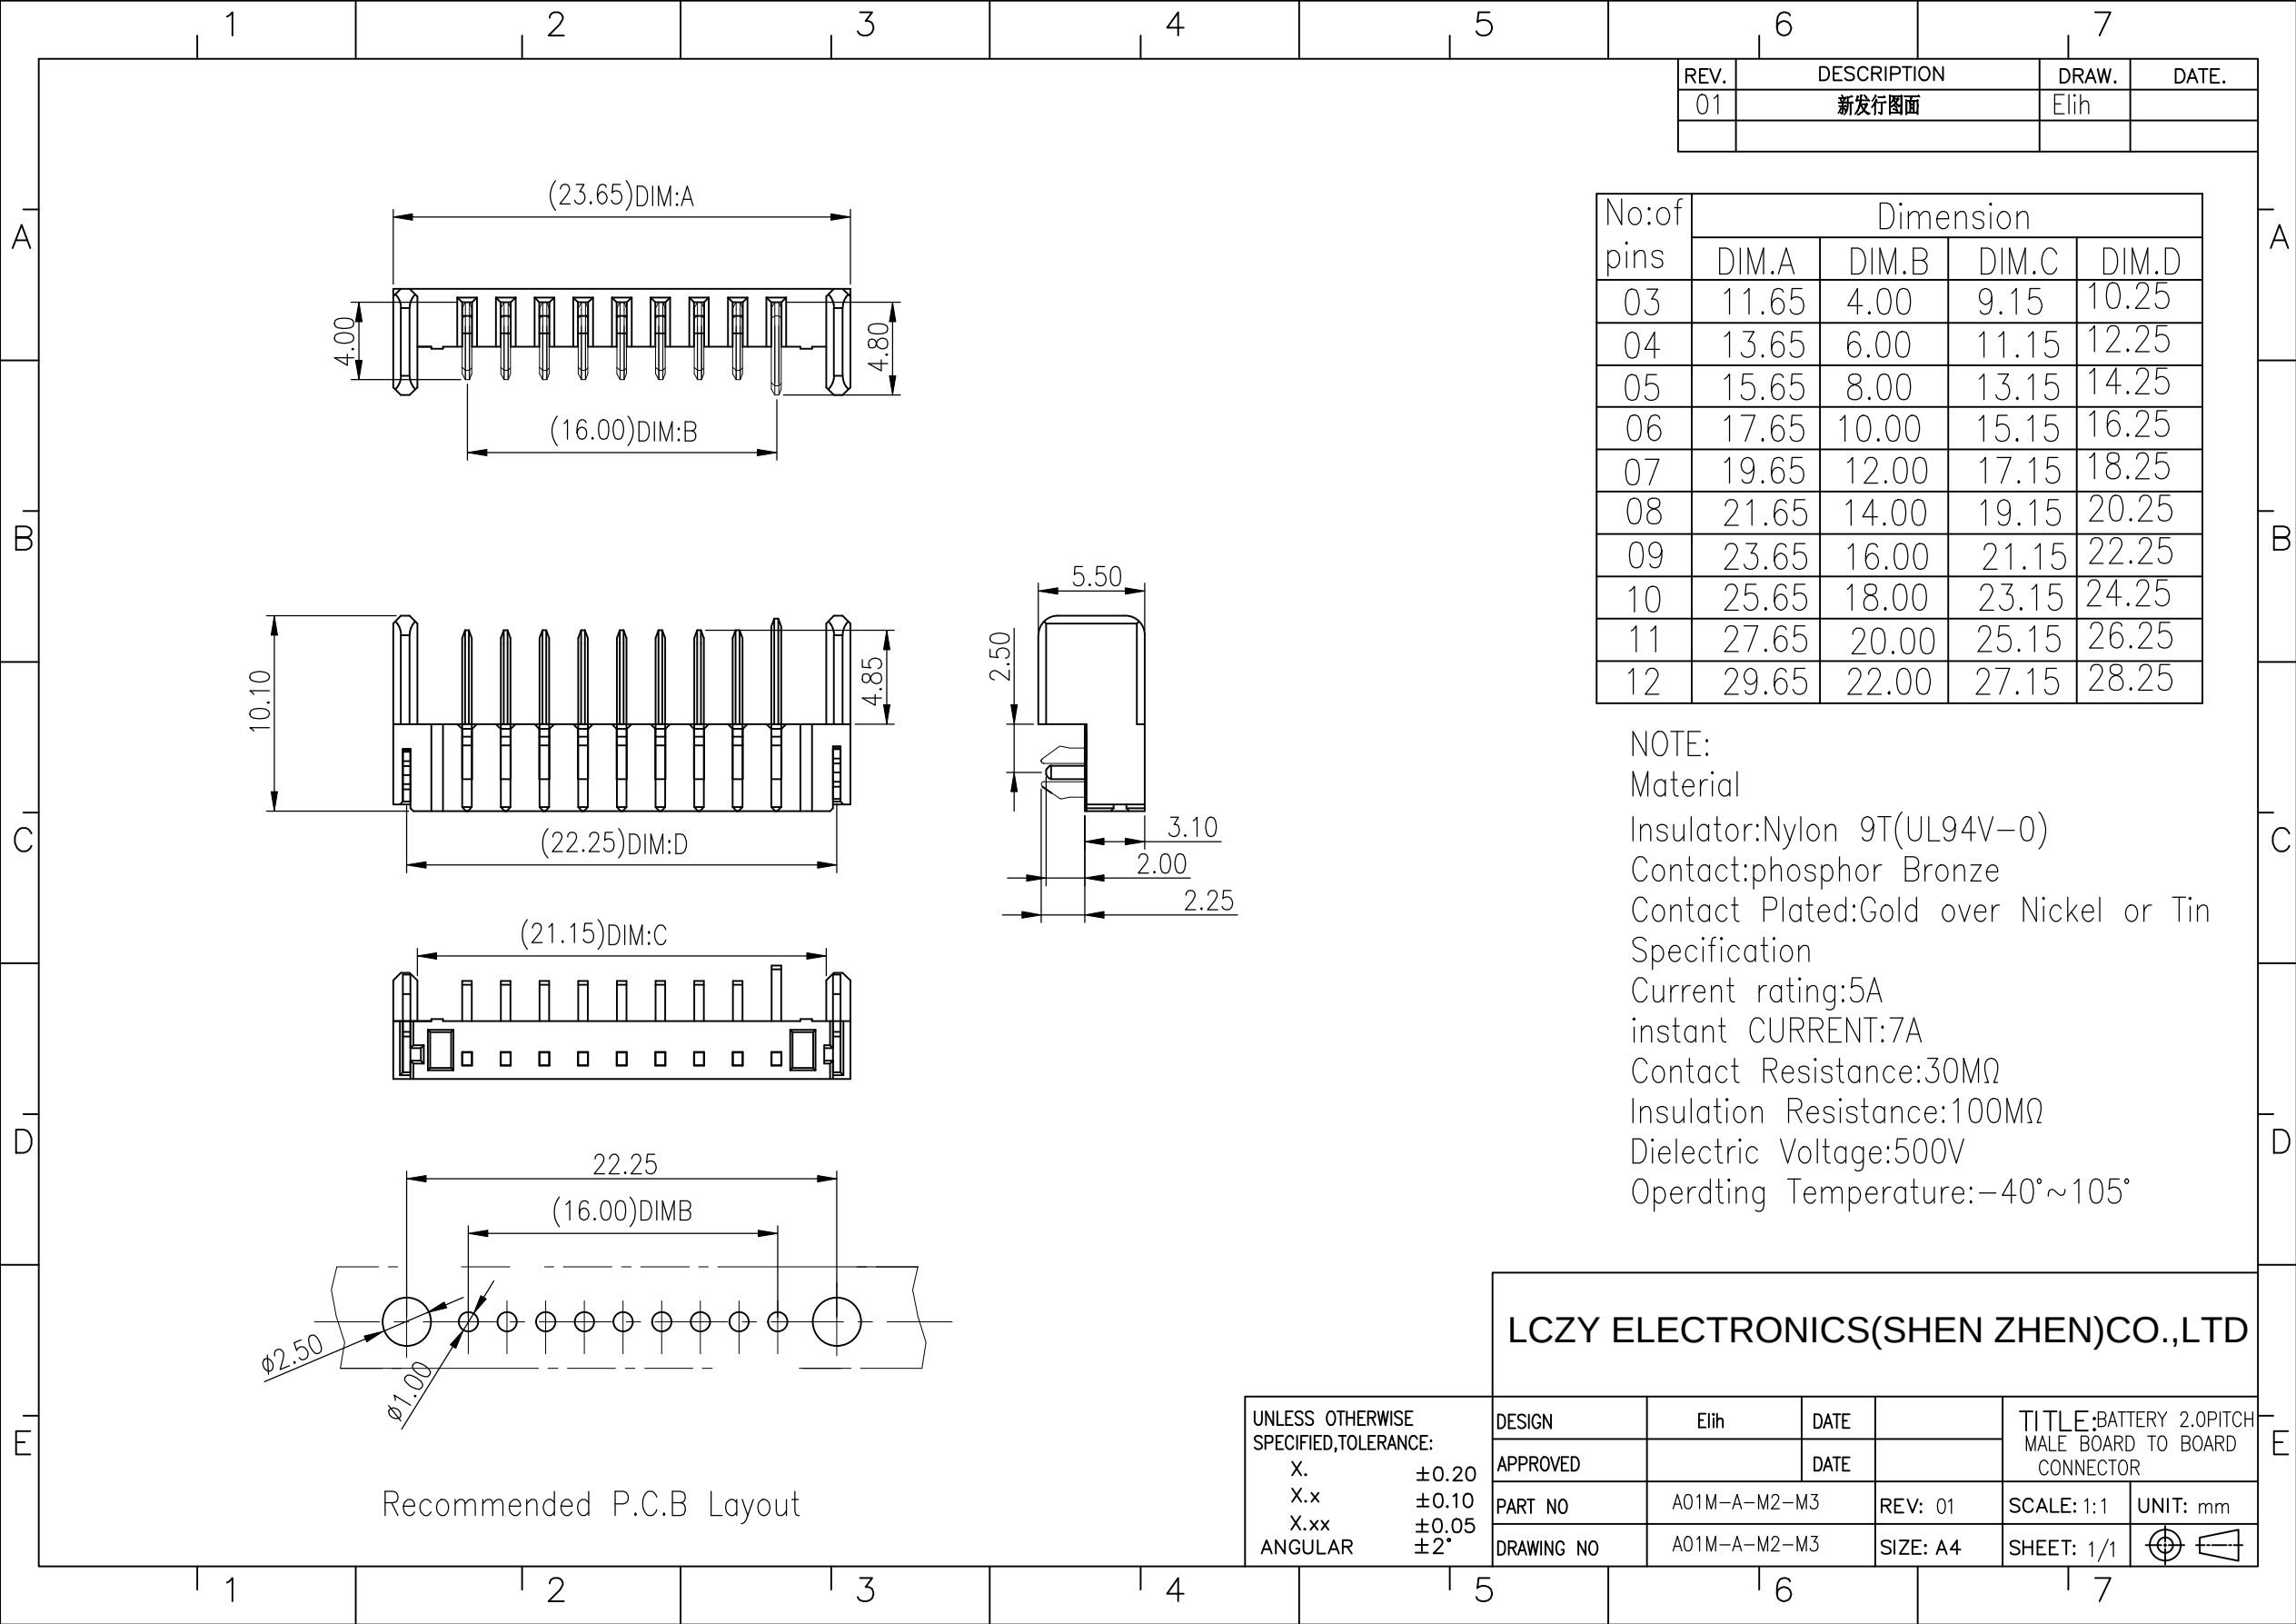

REV.	DESCRIPTION	DRAW.	DATE.
01	新发行图面	Elih	

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	11.65	4.00	9.15	10.25
04	13.65	6.00	11.15	12.25
05	15.65	8.00	13.15	14.25
06	17.65	10.00	15.15	16.25
07	19.65	12.00	17.15	18.25
08	21.65	14.00	19.15	20.25
09	23.65	16.00	21.15	22.25
10	25.65	18.00	23.15	24.25
11	27.65	20.00	25.15	26.25
12	29.65	22.00	27.15	28.25

NOTE:
Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:5A
instant CURRENT:7A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.20 X.x ±0.10 X.xx ±0.05 ANGULAR ±2°	DESIGN	Elih	DATE		TITLE:BATTERY 2.0PITCH MALE BOARD TO BOARD CONNECTOR	
	APPROVED		DATE			
	PART NO	A01M-A-M2-M3		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	A01M-A-M2-M3		SIZE: A4	SHEET: 1/1	