
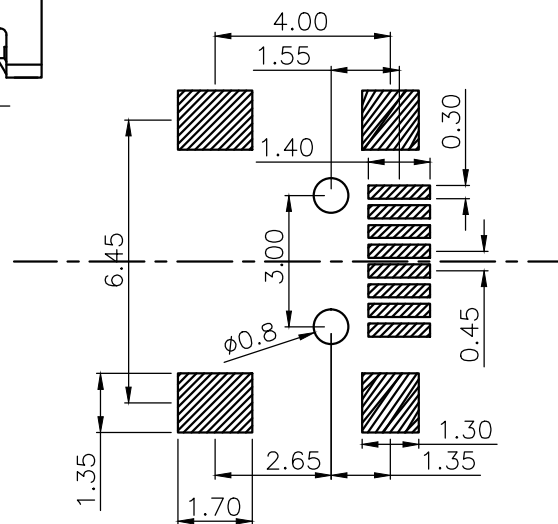

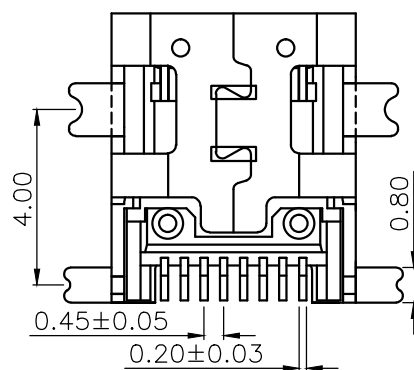
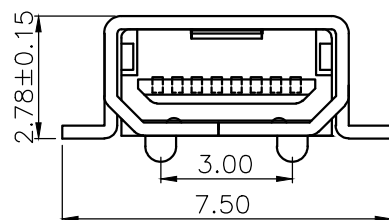


RoHS

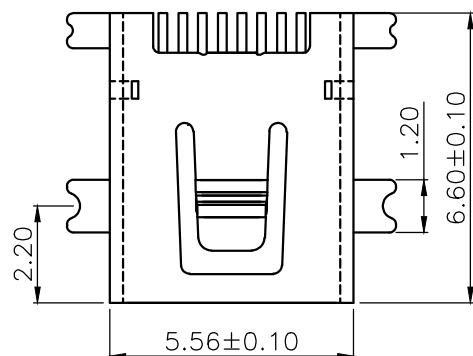

NOTE:

Electrical:

- 1.Current Rating: 1.0A/contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 milliohms MAX
- 4.Dielectric Withstanding Voltage: 300V AC at Sea Level
- 5.Insulation Resistance: 100MEGA ohms MIN

Raw material:

- 1.Plastic cement: Hing Temperature Thermoplastics, LCP Black
- 2.Contact: Copper Alloy C5191
- 3.Shell: Copper Alloy C2680

Electroplate:

- 1.Contact: Piated Gold in Mating Area, Tin On Solder Talls
- 2.Shell: Nickel Plating

public errand (公差) : $\pm 0.2\text{mm}$ unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		USB CONNECTOR		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		U-M-M8DD-W-1		CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE	APPROVAL		DATE	USB-09-2019
				SCALE	2:1	PAGE	1 OF 1

U-M-M8DD-W-1