



RoHS
Compliant
2002/95/EC

PART NO: RI - - G - -

Seal:
T=Top Tape Sealed




Terminal Type:
S=Splay Terminal
H=Straight Terminal

Terminal:
G=Gold Plating


Number of positions:

Actuator Type:
R=Recessed Actuator(Top Tape Sealed Available Only)


DIMENSION:(UNIT:mm/inches)

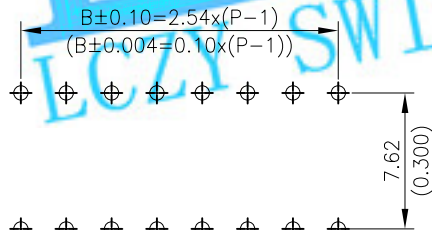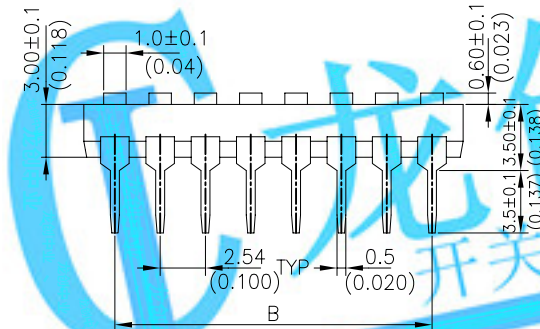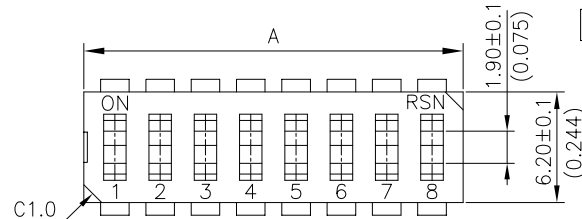

P.C.B. LAYOUT

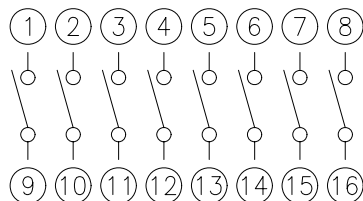

CIRCUIT DIAGRAM

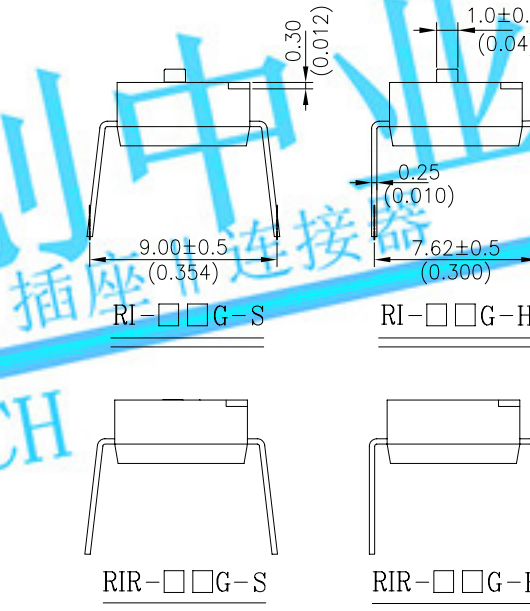

CONSTRUCTION

Prod No.	No.ofPOS	DIM.A	DIM.B
RI/RIR-01	01	3.48(0.137)	-----
RI/RIR-02	02	6.02(0.237)	2.54(0.100)
RI/RIR-03	03	8.56(0.337)	5.08(0.200)
RI/RIR-04	04	11.10(0.437)	7.62(0.300)
RI/RIR-05	05	13.64(0.537)	10.16(0.400)
RI/RIR-06	06	16.18(0.637)	12.70(0.500)
RI/RIR-07	07	18.72(0.737)	15.24(0.600)
RI/RIR-08	08	21.26(0.837)	17.78(0.700)
RI/RIR-09	09	23.80(0.937)	20.32(0.800)
RI/RIR-10	10	26.34(1.037)	22.86(0.900)
RI/RIR-12	12	31.42(1.237)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-O NYLON	MOLDED WHITE
2	COVER	UL94V-O NYLON	MOLDED BLACK
3	BASE	UL94V-O NYLON	MOLDED BLACK
4	CONTACT	BERYLLIUM COPPER	GOLD PLATED AT CONTACT AREA
5	TERMINAL	BRASS	GOLD PLATING

尺寸範圍	容許值	UNITS mm(IN)	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
0-4	±0.05	MAT'L	TITLE: MACHINE INSR TABLE TYPE DIP SWITCH			
4-16	±0.1	SEE NOTE				
16-50	±0.15	FINISH	DR: Ricky 2014/04/08			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE				
		Q'TY	CHKD: Ricky 2014/04/08			
			APPD:			
			SCALE	SHEET	REV.	CUSTOMER
			1:1	1/1	A	DRAWING