



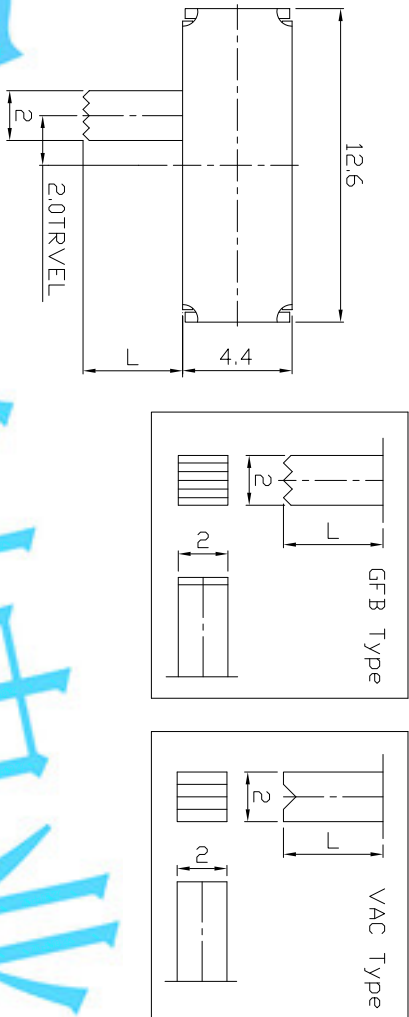



DIMENSIONS




MODEL CODE

SK-13D11 - GEE

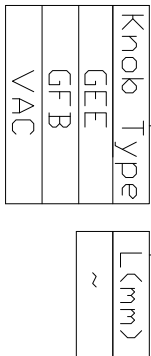

P.C.B LAYOUT
BOTTOM VIEW


CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

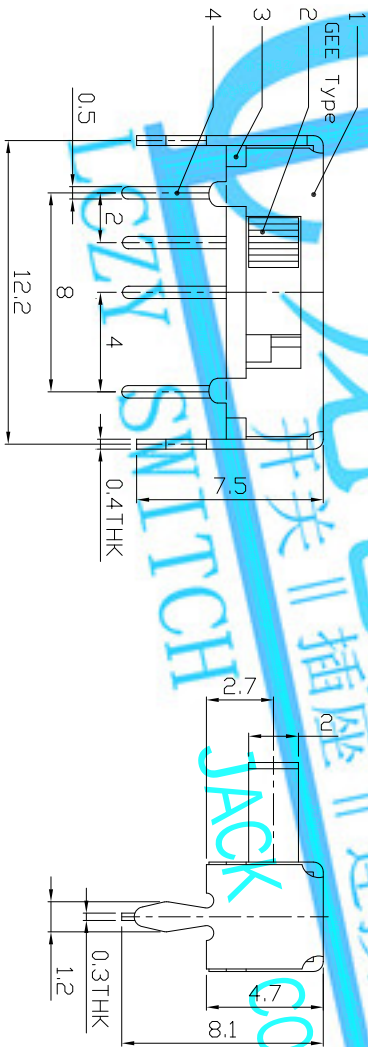

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL			
6	SPRING PLATE	STAINLESS STEEL	1	NATURAL			SEE NOTE	PART NO.: SK-13D11			
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD			FINISH	DWG NO.: ADL-13D11			
4	TERMINAL	BRASS STRIP	4	Ag PLATED OVER Ni PLATED			SEE NOTE	SCALE: 1/1			
3	BASE	PHENOLIC RESIN	1	NATURAL			DR: Ricky	REV. A			
2	KNDB	POM	1	BLACK			CHKD: Ricky	CUSTOMER DRAWING			
1	FRAME	STEEL STRIP	1	Ni PLATED			APPD: 4/1				
ND	PARTS	MATERIAL	Q'TY	FINISHING							