



RoHS
Compliant
2002/95/EC





MODEL CODE

SS-23D01- GBF

Knob Type
GBF
VAI

L(mm)
~

DIMENSIONS

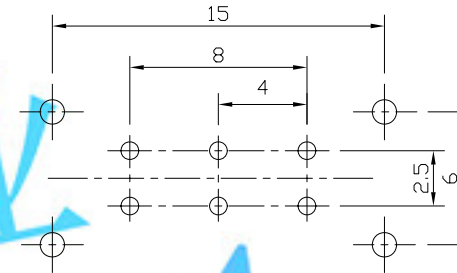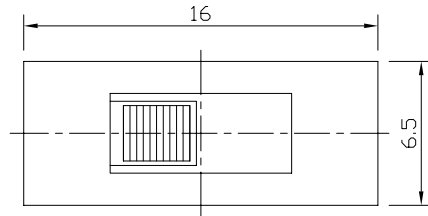



CIRCUIT DIAGRAM

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

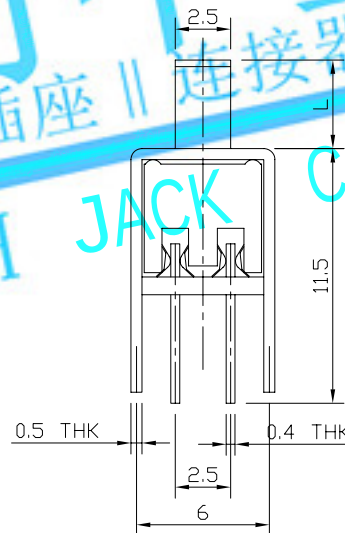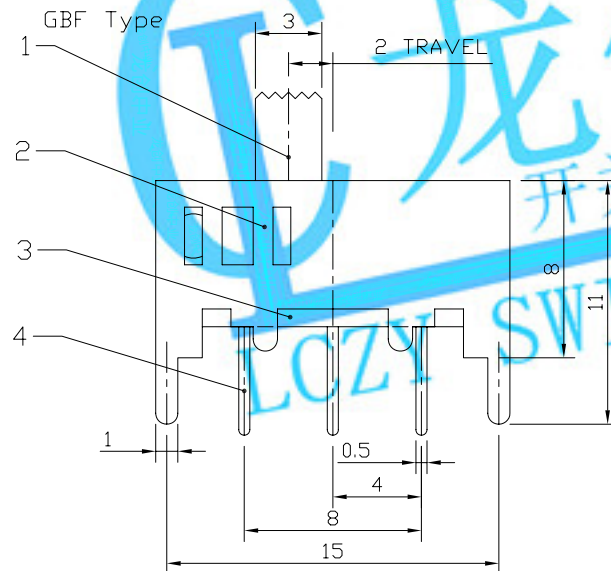

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-23D01				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			FINISH	DR: <i>Ricky</i> 2015/05/28		DWG NO.: ADL-23D01			
4	TERMINAL	BRASS STRIP	6	Ag PLATED			SEE NOTE	CHKD: <i>Ricky</i> 2015/05/28		SCALE	SHEET	REV.	CUSTOMER DRAWING
3	BASE	PHENOLIC RESIN	1	NATURAL			Q'TY	APPD:		3:1	1/1	A	
2	FRAME	STEEL STRIP	1	Ni PLATED									
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.								

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.