


DIMENSIONS

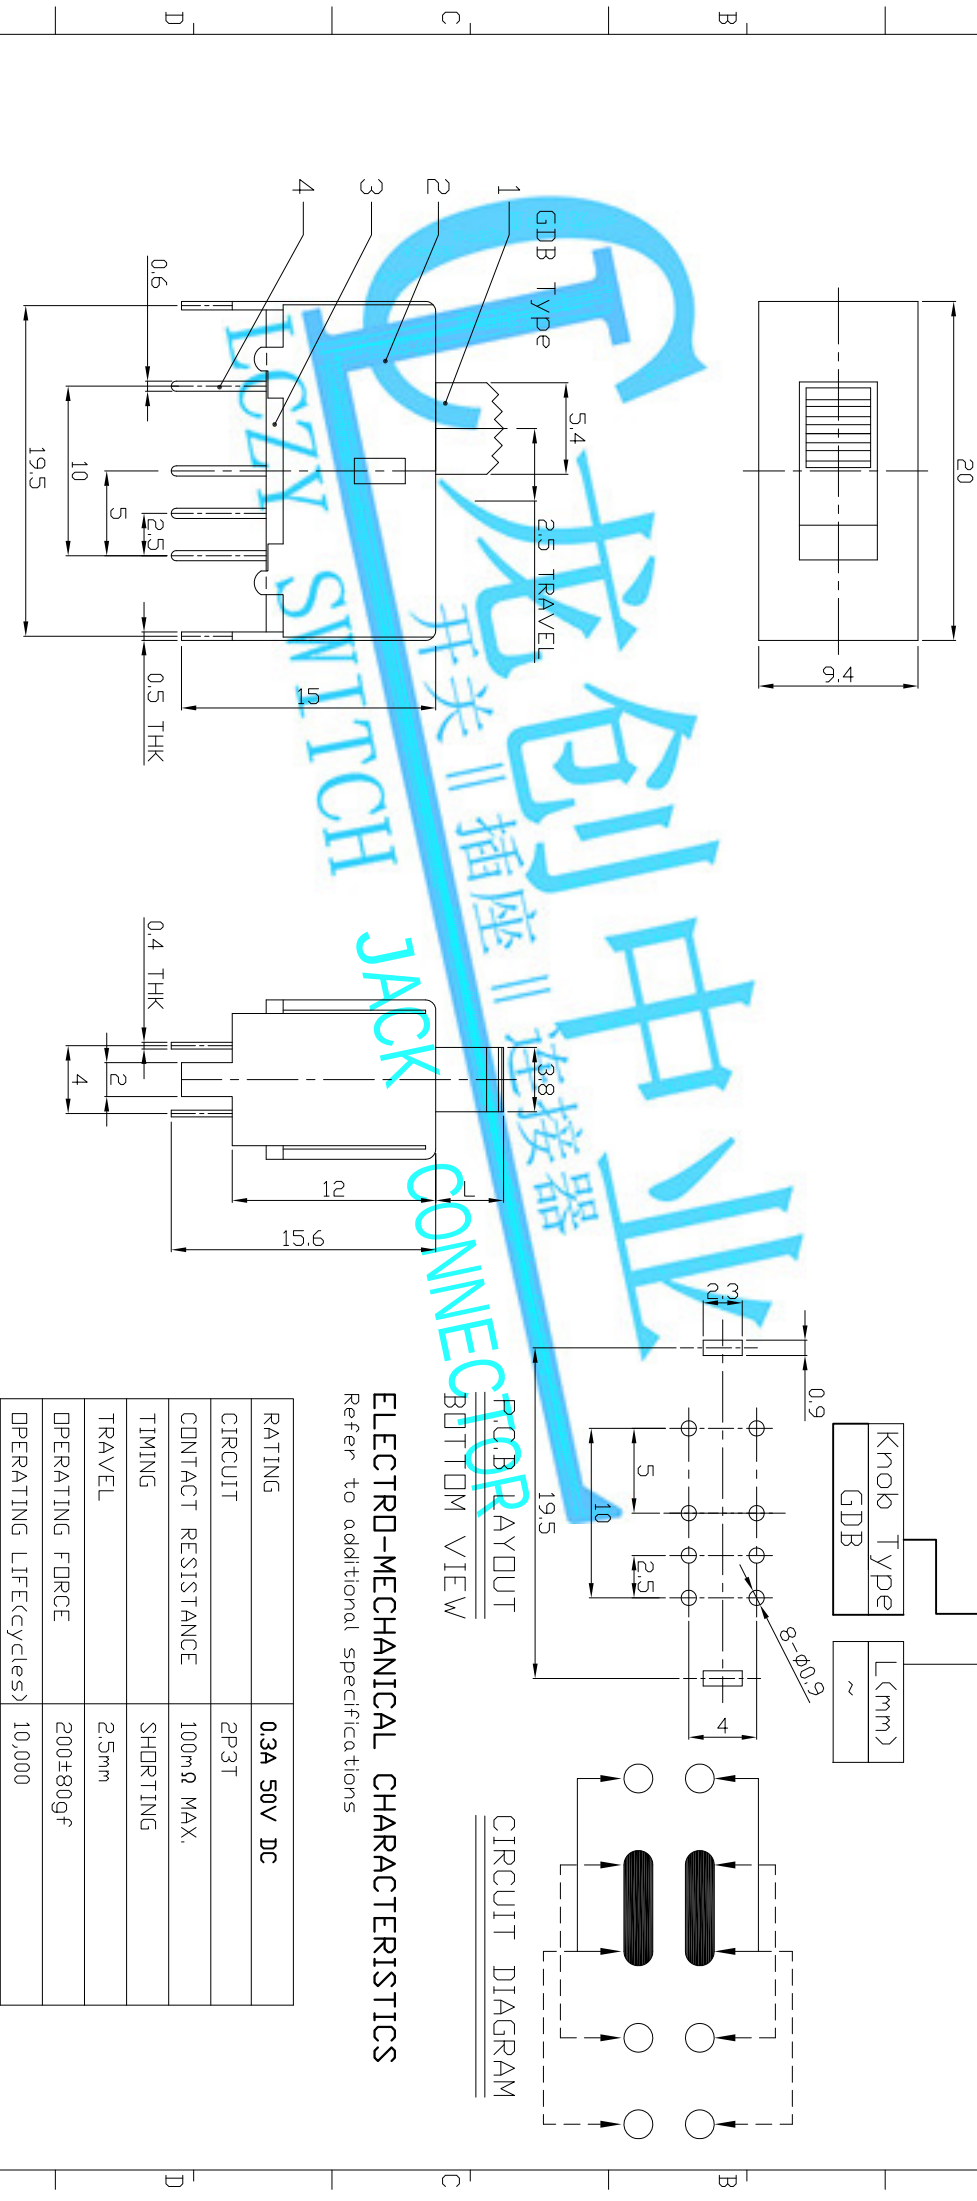


MODEL CODE

SS-23E01-GDB

Knob Type
GDB
L(mm)
~

PCB LAYOUT
BOTTOM VIEW

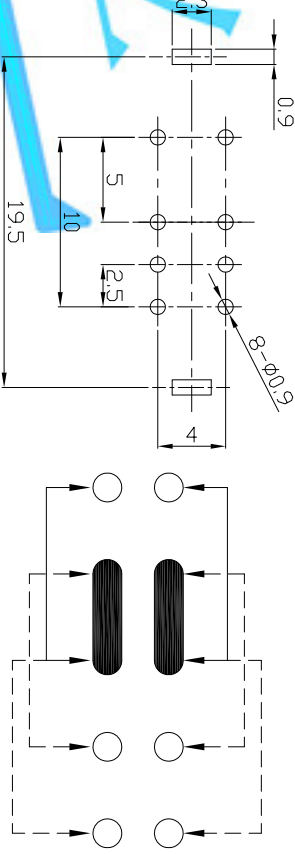

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
1	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm		
2	STEEL WIRE	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm		
3	CONTACT CLIP	PBS STRIP	2	Ag PLATED			
4	TERMINAL	BRASS STRIP	8	Ag PLATED			
5	BASE	PHENOLIC RESIN	1	NATURAL			
6	FRAME	STEEL STRIP	1	NI PLATED			
7	KNDB	POM	1	BLACK			
8	PARTS	MATERIAL	Q'TY	FINISHING			