

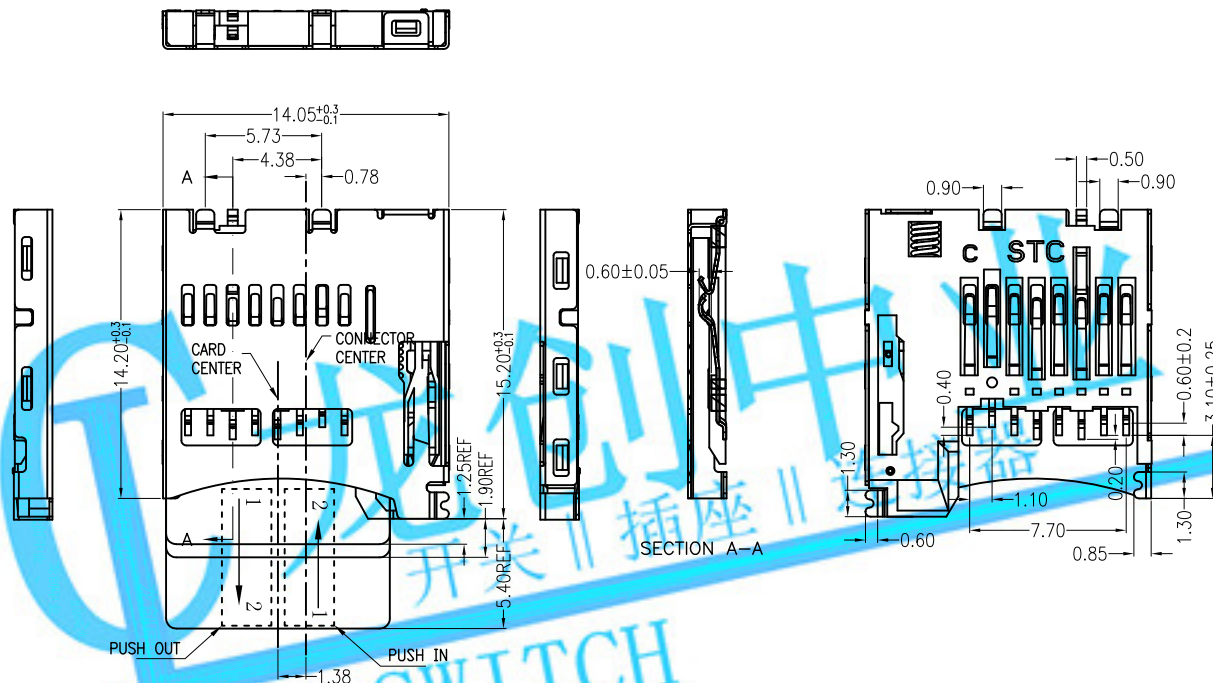


REV.	DESCRIPTION	APPD	DATE

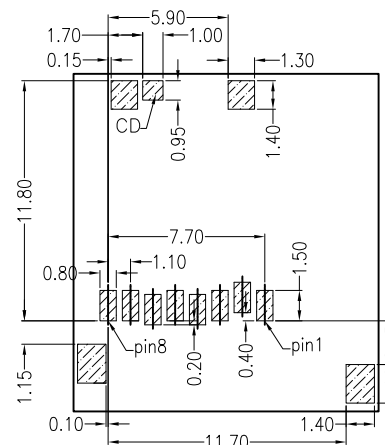


- NOTES:
- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
 - 2.PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
 - 3.MULTIMEDIA CARD COMPATIBLE

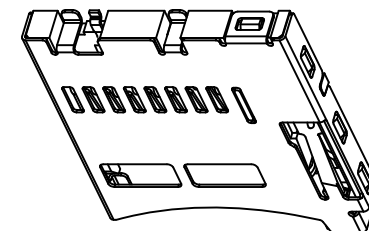



RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)

PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)


PART NO: TFNF3-EBS1-1111		MATERIAL:		LONGCHUANG ZHONGYE (HK)CO.,LIMITED	
MODEL NO:		FINSH:			
UNIT: MM	SIZE: A4	COLOR:		TITLE: T-FLASH内焊 PUSH C Type	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		DR: 杨凯 0416'10			
GENERAL ANGLE: X.X=±3.0' X.XX=±2.0'		CHK:		DWG NO: FP-100069	
		APP:		REV: B/1	
				SCALE: 1:1	
				SHEET: 1 OF 2	
					




REV.	DESCRIPTION	APPD	DATE

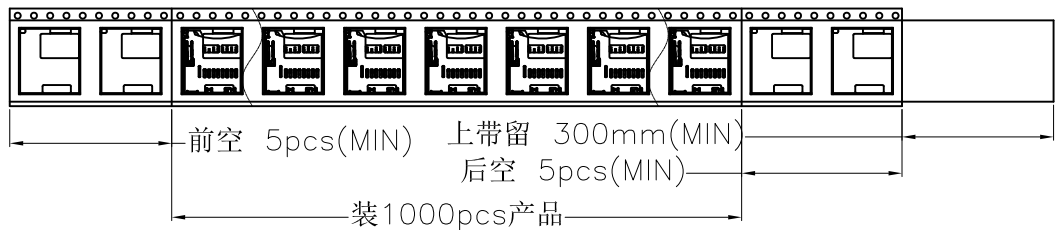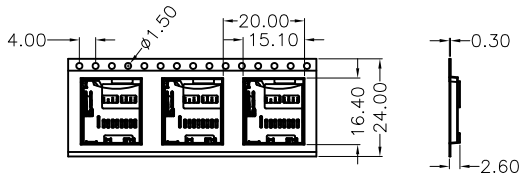

NO. 1

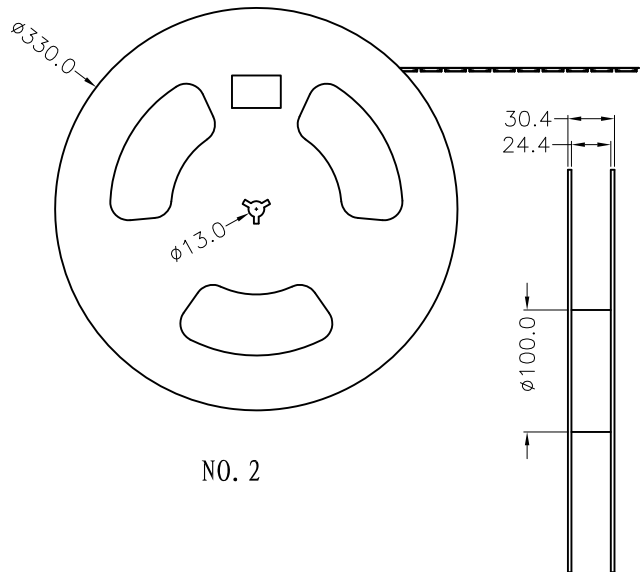


NO. 2

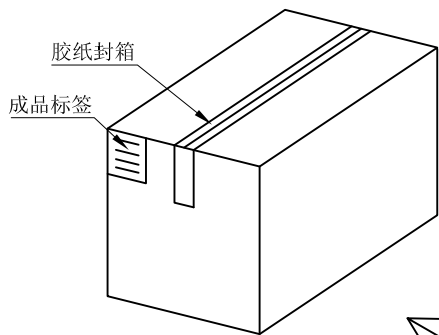

纸箱规格: 330*330*385

NO. 4

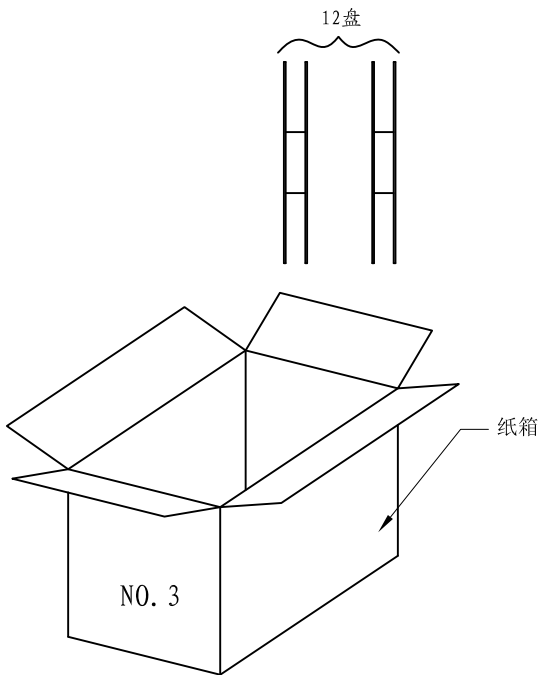

NO. 3

1. 材质要求:
- 1.1 纸箱的材质为B; 外形尺寸为33*33*38.5CM;
 - 1.2 卷盘的材质为PVC, 卷盘的外形尺寸为 $\phi 330*30.4$;
 - 1.3 卷带的材质为PVC, 卷带的外形尺寸为20200*24.00*2.6mm
2. 包装要求:
- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
 - 2.2 将包装好的产品从包装机上取下并包装好;
 - 2.3 把累叠好的12盘叠放入纸箱中共计12Kset;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

PART NO: TFNF3-EBS1-1111		MATERIAL:		深圳市高塑达电子有限公司		
MODEL NO:		FINSH:				
UNIT: MM	SIZE: A4	COLOR:		TITLE: T-FLASH内焊 PUSH C Type		
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15 GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		DR: 杨凯 0416'10				
		CHK:		DWG NO: FP-100069	REV: B/1	
		APP:		SCALE: 1:1	SHEET: 2 OF 2	